


Instruction

The expansion module that can be used with the outdoor station, supports both surface installation and flush installation. It can be freely matched and flexibly deployed according to the actual project to meet the needs of various scenarios such as apartments, villas, small offices.

B17-EX002/S

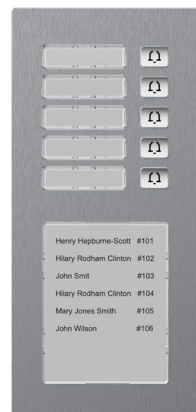

Key Features

- High quality, IK07, IP 65
- 5 Metal buttons, 1 Nameplate Area
- Nameplate and buttons with backlight
- Support surface and flush installation

Physical

- Material: Aluminum
- Power Supply: DC 12V
- Rated Power: 1W
- Standby Power: 1W
- RS485: 2 (1 for input, 1 for output)
- Dip switch: 4
- Dimension: 188 × 88 × 34 mm
- Working Temperature: -40°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

Connection Diagram

