

DH-HAC-HF3231E-T

2Megapixel 1080P Starlight HDCVI Box Camera



Features

- 1/2.8" 2.1Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HDCVI, SDI and SD output
- OSD Menu, control over coaxial cable
- 120dB True WDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- Audio, Alarm
- AC24V/DC12V


DH-HAC-HF3231E-T

Technical Specifications

Model	DH-HAC-HF3231EP-T		DH-HAC-HF3231EN-T
Camera			
Image Sensor	1/2.8" 2.1Megapixel CMOS		
Effective Pixels	1945(H)×1097(V)		
Electronic Shutter	1.3s~1/30,000s	1s~1/30,000s	
Video Frame Rate	25/50fps@720P; 25fps@1080P	30/60fps@720P; 30fps@1080P	
Synchronization	Internal		
Mini. Illumination	0.005Lux/F1.4 (color); 0.0005Lux/F1.4 (B/W)		
Video Output	1-channel BNC HDCVI high definition video output 1-channel BNC SDI video output 1-channel BNC CVBS standard definition video output		
Camera Features			
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D/3D		
OSD Menu	Support		
Lens			
Lens Type	Manual/Auto Iris		
Mount Type	C/CS		
Auxiliary Interface			
RS485	1		
Alarm	2 channel in/ 1 channel out		
Audio	1 channel in		
General			
Power Supply	AC24V±25% / DC12V±25%		
Power Consumption	Max 4.7W		
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Dimensions(W×D×H)	125mm×74mm×66mm		
Weight	0.48kg		
Material	Metal		

DH-HAC-HF3231E-T

Dimensions (mm)

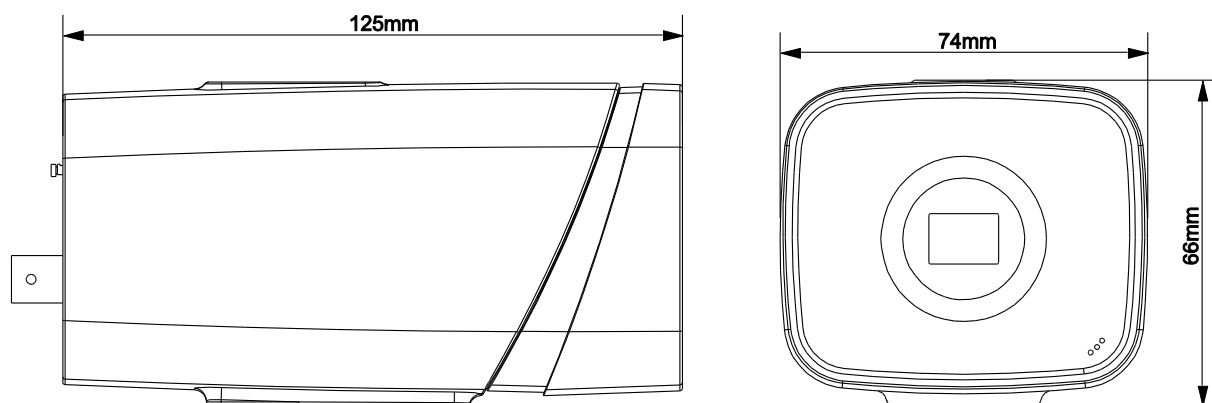

Accessories (optional)

				
PFB110W	PFB121W	PLZ1030-D	PLZ1130-D	PFH610N/V

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.