

DS-2CD2023G0E-I 2 MP IR Fixed Network Bullet Camera



Key Features

- 1/2.8" Progressive Scan CMOS
- 1920 × 1080 @30fps
- 2.8 mm fixed lens
- H.265+, H.265, H.264+, H.264
- 3D Digital Noise Reduction
- Region of Interest
- 120 dB WDR
- IP67



Specifications


Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @(F2.0, AGC ON)
Shutter Speed	1/3 s to 1/100,000 s
Slow Shutter	Yes
Auto-Iris	No
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
Wide Dynamic Range	120 dB WDR
3-Axis Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lens	
Focal length	2.8 mm
Aperture	F2.0
Focus	No
FOV	2.8 mm, horizontal FOV: 114°, vertical FOV: 62°, diagonal FOV: 136°
Lens Mount	M12
IR	
IR Range	Up to 30 m
Wavelength	850 nm
Compression Standard	
Video Compression	Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG
H.264 Type	Baseline Profile/Main Profile/High Profile
H.264+	Main stream supports
H.265 Type	Main Profile
H.265+	Main stream supports
Video Bit Rate	32 Kbps to 8 Mbps
Smart Feature-set	
Behavior Analysis	Line crossing detection, intrusion detection
Region of Interest	Support 1 fixed region for main stream
Image	
Max. Resolution	1920 × 1080
Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)
Sub Stream	50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)
Image Enhancement	BLC/3D DNR
Image Settings	Rotate mode, saturation, brightness, contrast and sharpness are adjustable via client software and web browser
Day/Night Switch	Auto/Scheduled/Day/Night
Network	
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD error, HDD full
Network Storage	Support built-in microSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR

Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, QoS, IPv6, UDP, Bonjour
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark
Firmware Version	5.5.80
API	ONVIF(PROFILE S,PROFILE G), ISAPI
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator and User
Client	iVMS-4200, Hik-Connect, iVMS-5200, iVMS-4500
Web Browser	IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+
Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Reset Button	Yes
General	
Operating Conditions	-40 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 VDC $\pm$ 25% PoE: 802.3af, class 3
Power Consumption and Current	12 VDC, 0.3 A, max. 4 W PoE (802.3af, 36 to 57 V), 0.2 A to 0.1 A, max. 5.5 W
Protection Level	IP67
Material	Front cover: plastic, back cover: metal
Dimensions	69.7 mm $\times$ 67.9 mm $\times$ 171.4 mm (2.7" $\times$ 2.7" $\times$ 6.7")
Weight	350g (0.8lb.)

Available Models:

DS-2CD2023G0E-I (2.8 mm)

Dimensions

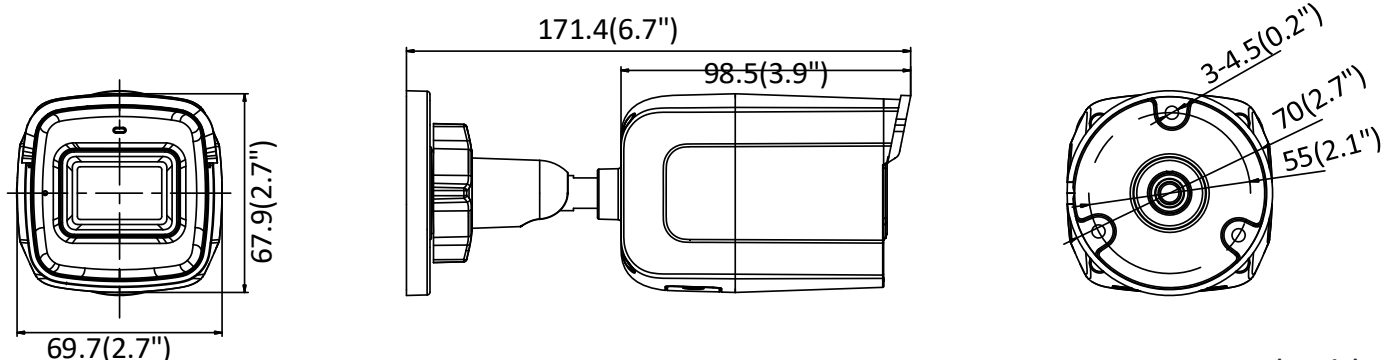

Unit: mm(inch)

Accessory



DS-1280ZJ-S

Junction Box

Distributed by



HIKVISION

Headquarters

No.555, Qianxin Road, Shijiazhuang District,
Hengzhou 310051, China
T +86-571-8807-5008
overseasbusiness@hikvision.com

05058020180927

Hikvision USA
T +1-509-885-8400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8505-4233
sales.au@hikvision.com

Hikvision India
T +91-22-25460600
sales@promabikvision.com

Hikvision Canada
T +1-866-2DC-8883
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-5919
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5547770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6302
info.it@hikvision.com

Hikvision Brazil
T +55-11-3318-0050
latin.support@hikvision.com

Hikvision Turkey
T +90-2165917070-7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-7413
sales.my@hikvision.com

Hikvision UK & Ireland
T +44-828-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel +27-11-0351177
sales.gha@hikvision.com

Hikvision France
T +33(0)1-85-280-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-777-9730667
n.kirpichnikova@hikvision.ru

Hikvision Vietnam
T +84-974778888
sales.vn@hikvision.com

Hikvision UAE
T +971-4-4432093
sales.me@hikvision.com

Hikvision Singapore
T +65-6884-5718
sg@hikvision.com

Hikvision Spain
T +34-91-737-15-55
info.es@hikvision.com

Hikvision Tashkent
T +99-82-1238-0438
td@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-885-87-89
russia@hikvision.com

Hikvision Korea
T +82-1001-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-418-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2333759
Sales.indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com