

DH-PFM930I-6N

200m RG6 Coaxial Cable



Features

- 200m RG6, wooden spool;
- Professional quality cable for use with most CCTV camera systems;
- Over 1km long transmission distance for 720P;
- Supplied on wooden reels for easy storage and installation;
- Environmentally-friendly outer sheath, meet the CPR E class;



Technical Specifications

Model		DH-PFM930I-6N
Conductor	Material	OFC
	Wire gauge	18AWG (1.02mm)
Insulation	Material	FPE
	Diameter	4.80mm±0.20mm
Tape	Material	Single-sided aluminum foil
	thickness	0.026mm
Braid	Braiding Material	Al-mg wire (Aluminum magnesium alloy wire)
	Braiding Structure	0.12mm*64(16*4)
Jacket	Material	PVC, meet the requirement of CPR E class
	Min. average thickness	0.78mm
	Diameter	6.9mm±0.2mm
	Color	Black
Length		200m (656.17ft)
Mark spacing		1000mm
Impedance		75Ω±3Ω
General	Working temperature	-20℃ ~ +70℃ (-4°F ~ +158°F)
	Storage temperature	-40℃ ~ +80℃ (-40°F ~ +176°F)
	N.W.	8.0kg(17.64lb)
	Weight(with wooden spool)	8.3kg(18.3lb)
	Packaging dimension	Φ280mm*240mm(Φ11.02"x9.45")

Order Information

Type	Part Number	Description
Cable	DH-PFM930-59N	200m RG59 Coaxial Cable
	DH-PFM930I-6N	200m RG6 Coaxial Cable
	DH-PFM940I-59N/2	200m RG59 Coaxial Cable with Power Cable (RG59+2C)
	DH-PFM940I-6N/2	200m RG6 Coaxial Cable with Power Cable (RG6+2C)

Dimensions (mm/inch)

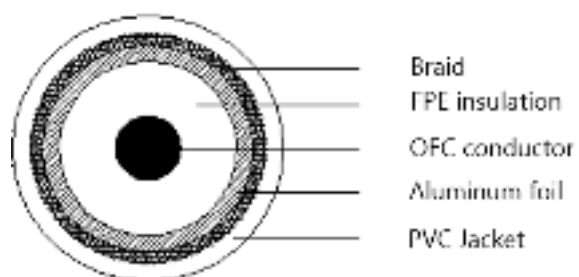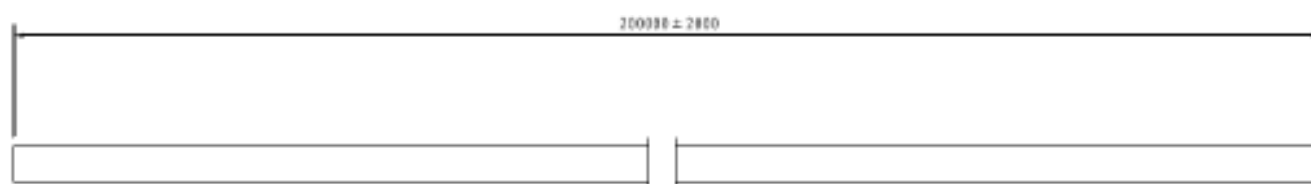

Package Information

- 200m RG6 Coaxial Cable *1