



Features


- 1/3 inch Sony Super HAD CCD
- High Resolution : 550 TV Lines
- Built-in DC Iris Vari-focal Lens(f=2.9~10mm)
- Day&Night (ICR), 2x Digital Zoom (On/Off)
- Digital Slow Shutter (On/Off)
- SDNR (Super Digital Noise Reduction)
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- Min : Day (0.3 Lux),Night(0.001Lux, DSS&ICR)
- Extra Video Out Port for Installer
- 3—Axis Camera Construction
- Dome Size : 100mm
- Audio Function (Option)



Optional Model

- D2815NVF/D2815PVF : 24VAC/12VDC Dual Voltage

DIMENSIONS

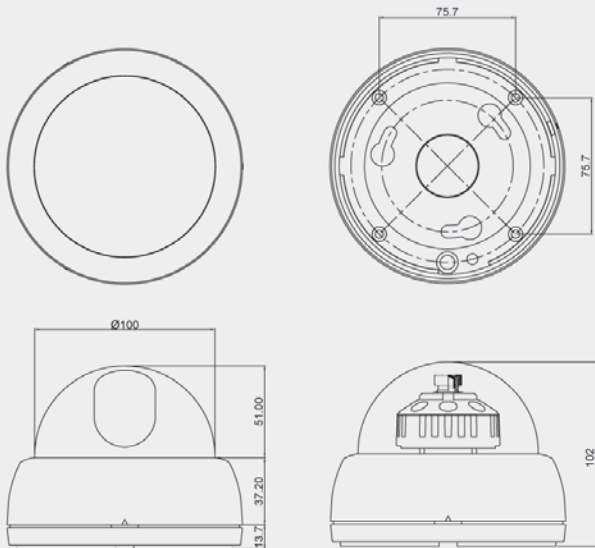

SPECIFICATIONS

Model	D2810NVF	D2810PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 kHz	15.625 kHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch SONY Super HAD CCD	
Total Pixels	811 (H) x 508 (V) 410K	795 (H) x 596 (V) 470K
Total / Effective Pixels	768 (H) x 494 (V) 380K	752 (H) x 582 (V) 440K
Horizontal Resolution	550 TV Lines	
Video Output	Composite: 1.0V p-p, 75Ω, Unbalanced	
S/N Ratio	More than 50dB(AGC Off)	
Lens	Built in DC Iris Vari-focal Lens (f=2.9~10mm)	
Digital Zoom Ratio	2x (On/Off, DIP Switch)	
Min.Illumination	Day (0.3Lux), Night(0.001Lux, DSS&ICR)	
D&N (ICR)	On/Off (DIP Switch)	
SDNR	Built in	
DSS	On/Off (DIP Switch)	
White Balance	Auto	
AGC/BLC/Flickerless	On/Off (DIP Switch)	
Shutter Speed	1/60~1/120,000	1/50~1/120,000
Power Consumption	Max. 1.8W/150mA	
Supplied Voltage	DC 12V (9V~15V)	
Dimensions(ØxH)	100.0 x 102.0 mm	
Weight	Approx. 366g	