




Features

- 1/3 inch IT CCD
- High Resolution : 530 TV Lines
- Built in DC Iris Vari-focal Lens (f=2.8~10.5mm)
- OSD (On Screen Display)
- TDN(ICR)
- Auto White Balance, AGC
- Min. Illumination : 0.1 Lux
- Privacy Zone, Motion Detection
- Extra Video Out Port for Installer
- 3 Axis Movement for Free Lens Rotation
- Dome Size : 100mm

DIMENSIONS

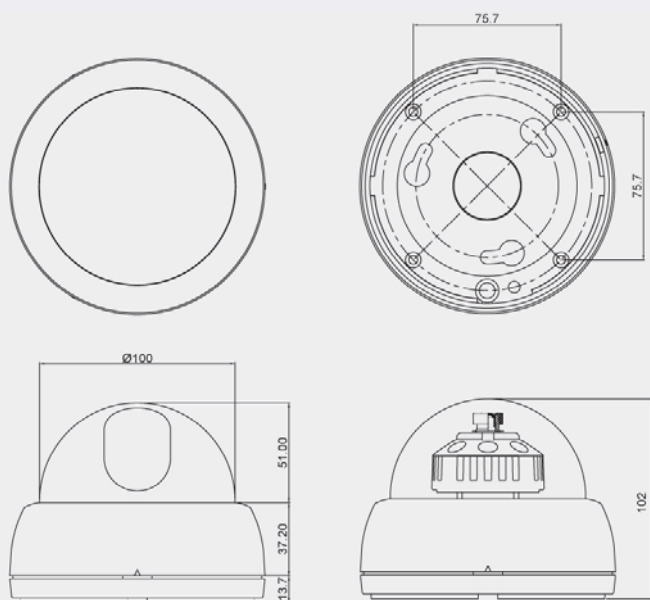

SPECIFICATIONS

Model	D2760NVF	D2760PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch IT CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Total / Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	530 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 48dB(AGC Off)	
Lens	DC Iris Vari-focal Lens (f=2.8~10.5mm)	
Day & Night	TDN(ICR)	
Min.Illumination	0.1 Lux	
OSD	On/Off	
White Balance	Auto	
AGC	On/Off	
Privacy Zone	4 Area	
Motion Detection	On/Off	
Mirror Function	On/Off	
Shutter Speed	1/60~1/100,000 Sec.	1/50~1/100,000sec.
Supplied Voltage	DC 12V (10V~15V)	
Power Consumption	140mA (Max)	
Dimensions (ØxH)	100.0 x 102.0 mm	
Weight	Approx. 366g	