



## Features


- 1/3 inch IT CCD
- High Resolution : 550 TV Lines
- Built in DC Iris Vari-focal Lens (f=2.8~10.5mm)
- Day&Night (ICR)
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- Min. Illumination : Day 0.3 Lux, Night 0.1 Lux
- Extra Video Out Port for Installer
- 3—Axis Camera Construction
- Dome Size : 100mm
- Audio Function (Option)



## Optional Model

- D2315NVF/D2315PVF : 24VAC/12VDC Dual Voltage

## DIMENSIONS

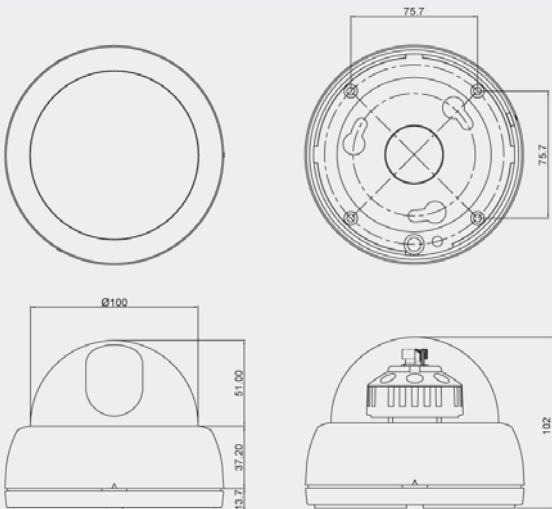

## SPECIFICATIONS

Model	D2310NVF	D2310PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch IT CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Total / Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	550 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 48dB(AGC Off)	
Lens	DC Iris Vari-focal Lens (f=2.8~10.5mm)	
Day&Night (ICR)	Auto	
Min.Illumination	Day (0.3 Lux), Night (0.1 Lux)	
White Balance	Auto	
AGC,BLC,Flickerless	On/Off (Dip Switch)	
Shutter Speed	1/60~1/100,000 Sec.	1/50~1/100,000sec.
Supplied Voltage	DC9V~15V (Recommendation DC12V±0.5V)	
Power Consumption	Max. 3W	
Dimensions(ØxH)	100.0 x 102.0 mm	
Weight	Approx. 366g	