

## DS-KH6320-WTE2 Indoor Station



### Key Feature


- Two-pin wire for power supply and network access
- UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- 2-ch transmission plan
- Stores messages and captured pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras
- Supports wireless network



## Specification

| Model                  |                            | DS-KH6320-WTE2                                    |
|------------------------|----------------------------|---------------------------------------------------|
| System                 | Processor basic frequency  | 1 G                                               |
|                        | Memory                     | 128 MB                                            |
|                        | Flash                      | 16 MB (32 MB hardware compatibility)              |
| Display                | Operation system           | Embedded Linux operation system                   |
|                        | Display screen             | 7-inch TFT LCD                                    |
|                        | Display resolution         | 1024 × 600                                        |
| Audio                  | Operation method           | Capacitive touch                                  |
|                        | Audio Input                | Build-in omnidirectional microphone               |
|                        | Audio output               | Built-in loudspeaker                              |
|                        | Volume                     | Local or software control                         |
|                        | Audio compression standard | G.711 U                                           |
| Network                | Audio compression rate     | 64 Kbps                                           |
|                        | Audio quality              | Noise suppression and echo cancellation           |
|                        | Wired network              | BroadR-Reach                                      |
|                        | Wireless network           | Wi-Fi 802.11b/g/n                                 |
|                        | Protocol                   | TCP/IP, SIP, RTSP                                 |
| Interface              | Network interface          | Two-wire interface                                |
|                        | RS-485                     | 1                                                 |
|                        | Alarm input                | 8 zones alarm input                               |
|                        | Relay output               | 2                                                 |
|                        | TF card                    | Support, Max. 32 GB                               |
| Extended Application   | Power interface            | Two-wire interface                                |
|                        | Mobile client              | Support                                           |
|                        | Indoor call elevator       | Support                                           |
|                        | IPC                        | Support                                           |
|                        | Power supply mode          | Two-wire                                          |
| General                | Power consumption          | ≤ 6 W                                             |
|                        | Working temperature        | -10 °C to 50 °C (-14 °F to 122 °F)                |
|                        | Working humidity           | 0% to 90%                                         |
| Dimensions (W × H × D) |                            | 200 mm × 140 mm × 15.1 mm (7.87" × 5.51" × 0.59") |


## Typical Application

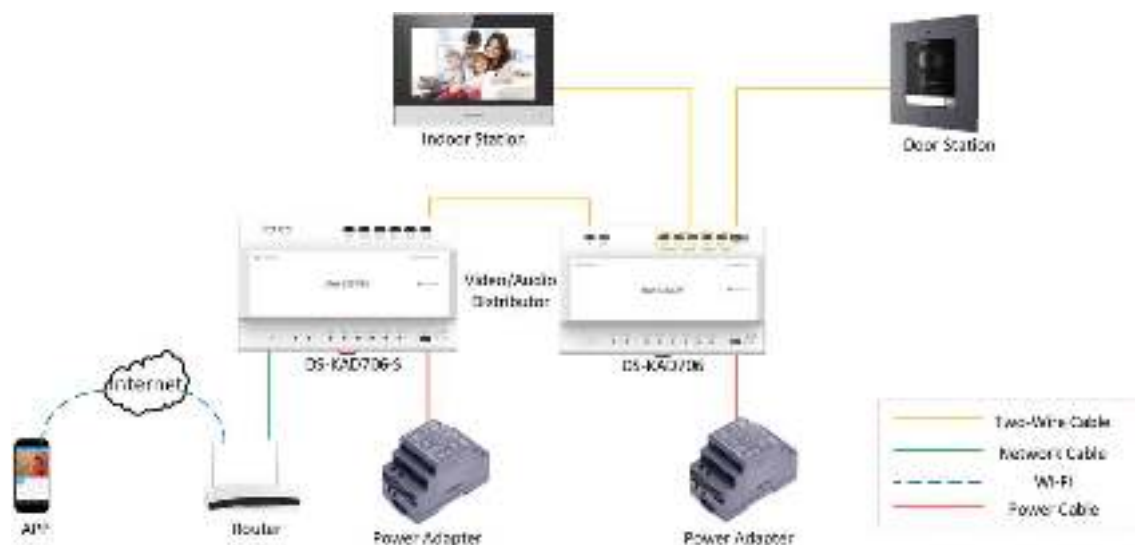

## Available Model

DS-KH6320-WTE2

## Physical Interface

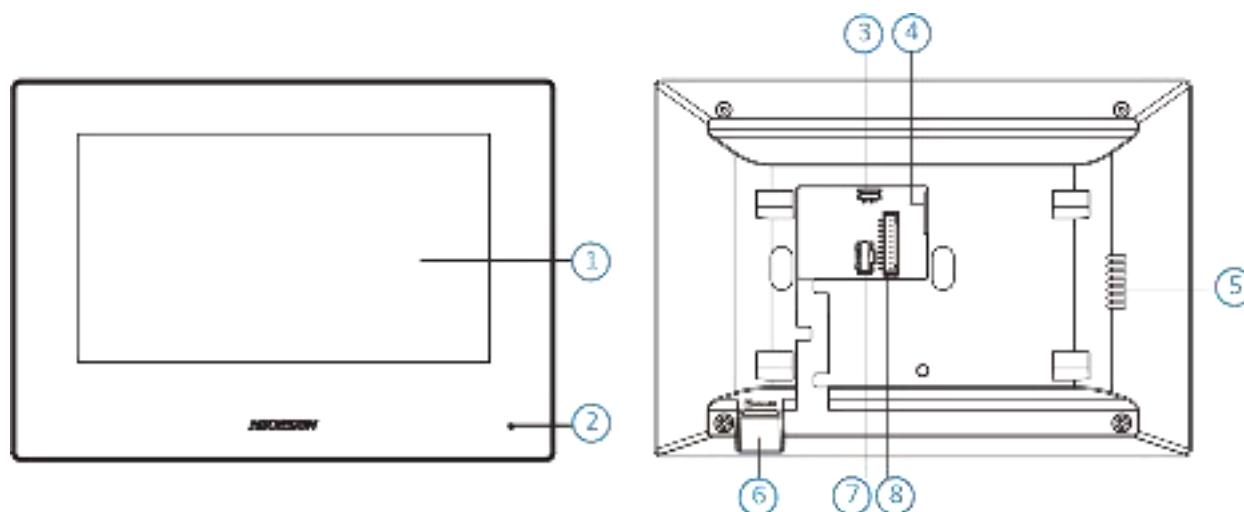

| No. | Description                        |
|-----|------------------------------------|
| 1   | Display Screen                     |
| 2   | Microphone                         |
| 3   | Debugging Port                     |
| 4   | Network Interface and Power Supply |
| 5   | Loudspeaker                        |
| 6   | TF Card Slot                       |
| 7   | Alarm Terminal                     |
| 8   | Reserved                           |

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8607-5008  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-985-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-9599-2233  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28403900  
sales@primahikvision.com

**Hikvision Canada**  
T +1-888-310-0390  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9946  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-3542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0439-9802  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3316-0850  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 12163217070-7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7852-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01828-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +2711010361172  
sales.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-8730667  
nikolapavlov@hikvision.kz

**Hikvision Vietnam**  
T +84-974270898  
sales.viet@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-65  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-84-1238-9438  
info@hikvision.uz

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-660-67-80  
sales.ru@hikvision.com

**Hikvision Korea**  
T +82-10131-731-8217  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-483-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com