

Network Video Recorder

NVR304-S Series




Key Features

- Support Ultra265/H.265/H.264 video formats
- 16/32-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Accurate retrieval, instant playback
- 4 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


Specifications

Model	NVR304-16S		NVR304-32S	
Video/Audio Input				
IP Video Input	16-ch		32-ch	
Two-way Audio Input	1-ch, RCA			
Network				
Incoming bandwidth	96Mbps		160Mbps	
Outgoing bandwidth	64Mbps		64Mbps	
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	HDMI: 4K (3840x2160)@30, 1920x1080p@60, 1920x1080p@50, 1600x1200@60, 1280x1024@60, 1280x720@60, 1024x768@60 VGA: 1920x1080p@60, 1920x1080p@50, 1280x1024@60, 1280x720@60, 1024x768@60			
Audio Output	1-ch, RCA			
Recording Resolution	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF			
Synchronous Playback	16ch		32-ch	
Corridor Mode Screen	3/4/5/7/9/10/12/16		3/4/5/7/9/10/12/16/32	
Decoding				
Decoding format	Ultra265/H.265/H.264			
Live view/ Playback	8MP/5MP/4MP/3MP/1080p/960p/960H/720p/D1/2CIF/CIF			
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30,32 x D1			
Hard Disk				
SATA	4 SATA interfaces			
Capacity	up to 10TB for each disk			
Smart				
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking			
VCA Search	Face search, Behavior search			
Statistical Analysis	People counting			
External Interface				
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces			
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0 Front panel: 1 x USB2.0			
General				
Power Supply	12V DC Power Consumption: ≤ 15W(without HDD)			
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)			
Dimensions(W×D×H)	440mm × 344mm ×44mm (17.3" × 13.5" ×1.7")			
Weight (without HDD)	≤ 3.15 Kg (6.94 lb)			

Dimensions

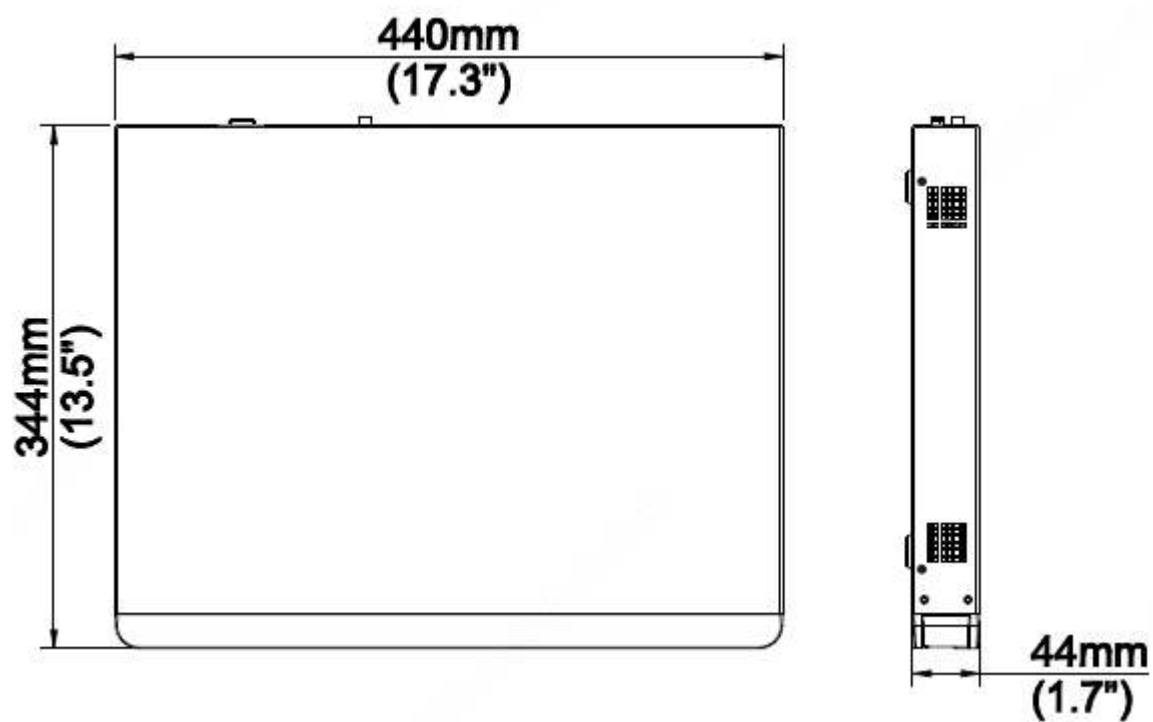

Rear Panel

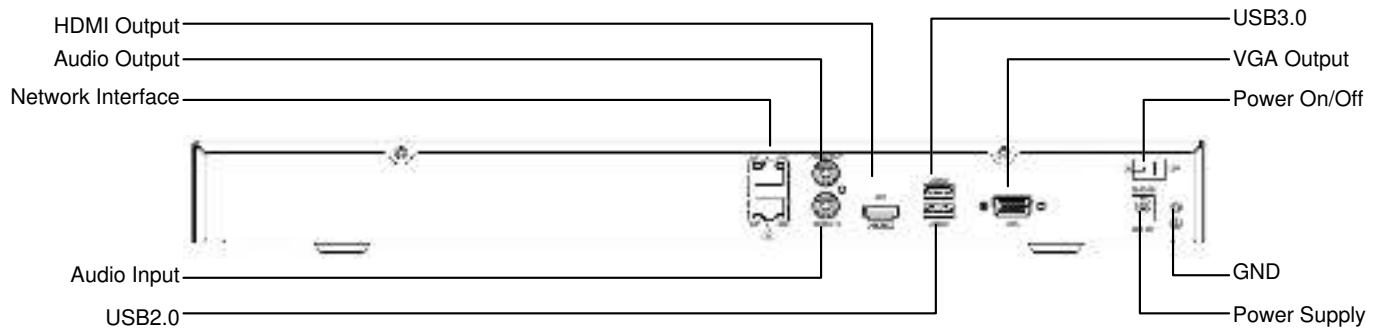

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.