

NIS-3200-005T

Промышленный коммутатор

Unmanaged: 5 10/100Base-TX, 12~48VDC, -40~70°C




Specifications



Switch Model	Sx10/100Base-T(X)
Physical Ports	
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX	5
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control
Processing	Store-and-Forward
LED Indicators	
Power Indicator	Green: Power LED x2
10/100Base-T(X) RJ45 Port Indicator	Green for port Link/Act; Amber for duplex indicator
Power	
Input Power	Dual 12~48 VDC power inputs at 4-pin terminal block
Power Consumption(Typ.)	3 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	26.1(W) x 70(D) x 95(H)mm [1.03x 2.76 x 3.74inch.]
Weight (g)	205g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-8

Installation


Din-Rail Install Step

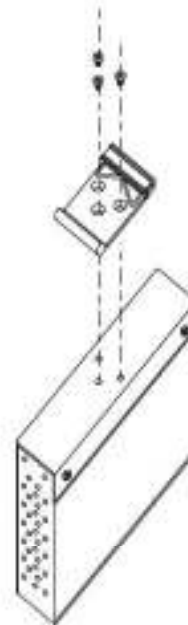

Wall-mounted Install Step

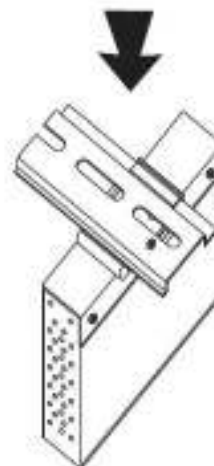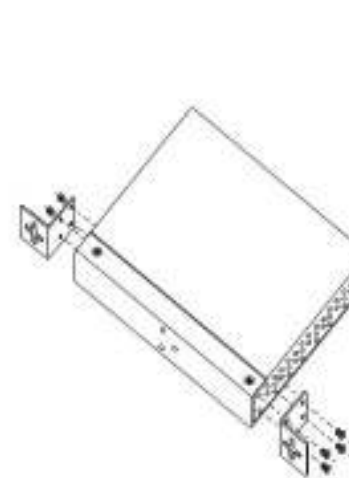

Front Panel

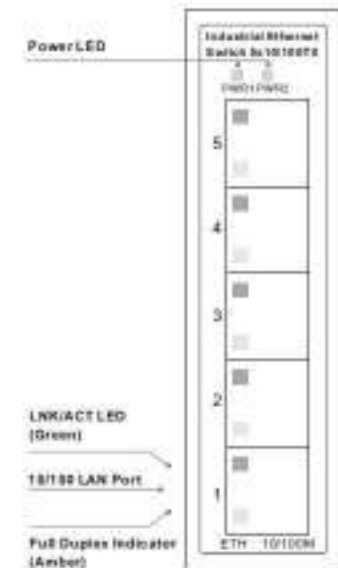

Power Connection Guide

