

5MP Network IR Fixed Dome Camera

IPC3615SR3-ADPF28(40)-F



Key Features

Optics

- Day/night functionality
- Up to 120dB WDR (Wide Dynamic Range)
- Smart IR, up to 30m (98ft) IR distance

Compression

- Ultra 265, H.264, MJPEG
- Triple streams

Network

- ONVIF Conformance

Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- 4KV surge protection designed for network interface
- IP67

Specifications

	IPC3615SR3-DPF28M				IPC3615SR3-DPF40M			
Camera								
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS							
Lens	2.8mm@F2.0				4.0mm@F2.0			
DORI Distance	Lens (mm)	Detect (m)		Observe (m)		Recognize (m)		Identify (m)
	2.8	63.1		25.2		12.6		6.3
	4.0	90.1		36.0		18.0		9.0
Angle of view(H)	105.6°				80.0°			
Angle of View (V)	69.9°				52.2°			
Angle of View (O)	137.3°				98.4°			
Adjustment angle	Pan: 0° ~ 360°			Tilt: 0° ~ 80°			Rotate: 0° ~ 360°	
Shutter	Auto/Manual, 1 ~ 1/100000s							
Minimum Illumination	Colour: 0.01Lux (F2.0, AGC ON) 0Lux with IR on							
Day/Night	IR-cut filter with auto switch (ICR)							
Digital noise reduction	2D/3D DNR							
S/N	>56dB							
IR Range	Up to 30m (98ft) IR range							
WDR	120dB							
Video								
Video Compression	Ultra 265, H.265, H.264, MJPEG							
H.264 code profile	Baseline profile, Main Profile							
Frame Rate	Main Stream: 5MP (2592*1944), Max 20fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 4CIF (704*576), Max 30fps; Third Stream: CIF (352*288), Max 30fps							
HLC	Supported							
BLC	Supported							
OSD	Up to 4 OSDs							
Privacy Mask	Up to 4 areas							
ROI	Up to 2 areas							
Motion Detection	Up to 4 areas							
Audio								
Audio Compression	G.711							
Suppression	Supported							
Sampling Rate	8KHZ							
Network								
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL							
Compatible Integration	ONVIF (Profile S, Profile T), API							


Interface

Network	1 RJ45 10M/100M Base-TX Ethernet
Built-in Mic	Supported

General

Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 5.5W
Dimensions (Ø x H)	Φ118 x 96mm (Φ4.6" x 3.8")
Weight	0.33kg (0.73lb)
Operating Conditions	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67

Dimensions

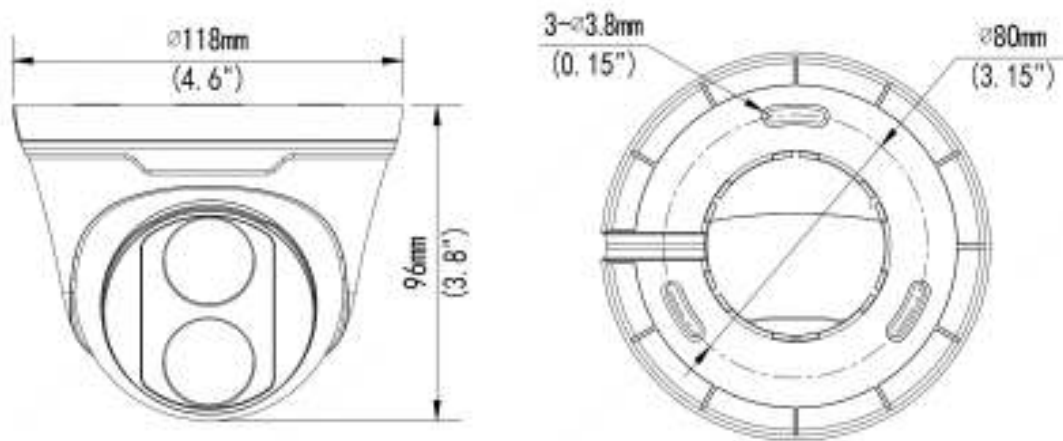

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.