

Network Video Recorder

NVR301-S3-P-RU Series




Key Features

- Support Ultra265/H.265/H.264 video formats
- 4/8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- Up to 4K resolution recording
- 1 SATA HDDs, up to 6 TB
- Support cloud upgrade

Specifications


Model	NVR301-04S3-P4-RU		NVR301-08S3-P8-RU	
Video/Audio Input				
IP Video Input	4-ch		8-ch	
Network				
Incoming Bandwidth	64Mbps			
Outgoing Bandwidth	48Mbps			
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	4-ch		8-ch	
Corridor Mode Screen	3/4		3/4/5/7/9	
Decoding				
Decoding format	Ultra265/H.265/H.264			
Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	1 x 4K@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 3MP@25, 4 x 1080p@30		1 x 4k@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 3MP@25, 4 x 1080p@30, 8 x 720p@30	
Hard Disk				
SATA	1 SATA interfaces			
Capacity	Up to 6TB for each disk			
Smart				
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection			
VCA Search	Face search, Behavior search			
External Interface				
Network Interface	1 RJ-45 10M/100Mself-adaptive Ethernet Interface			
USB Interface	Rear panel: 2 x USB2.0			
PoE				
Interface	4 independent 100 Mbps PoE network interfaces		8 independent 100 Mbps PoE network interfaces	
Max Power	Max 30W for single port Max 54W in total		Max 30W for single port Max 108W in total	
Supported Standard	IEEE 802.3at, IEEE 802.3af			
General				
Power Supply	48V DC Power Consumption: ≤9 W (without HDD)		52V DC Power Consumption: ≤9 W (without HDD)	
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)			
Dimensions (W×D×H)	260mm ×240mm × 46 mm (10.2" × 9.4" ×1.8")			
Weight (without HDD)	≤1.1kg (2.43lb)			

Dimensions

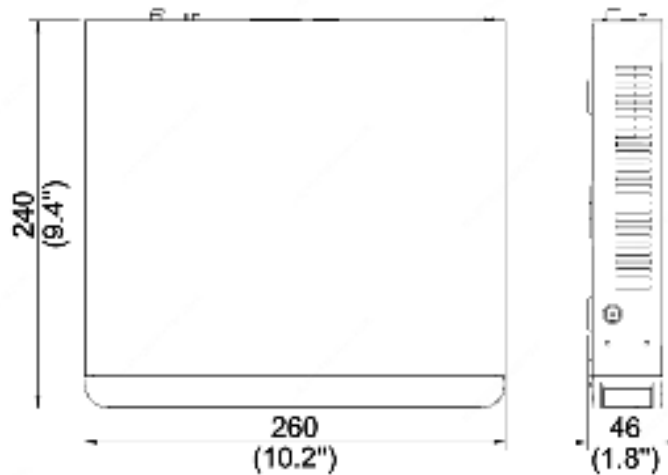

Rear Panel

Take **NVR301-04S3-P4** for example

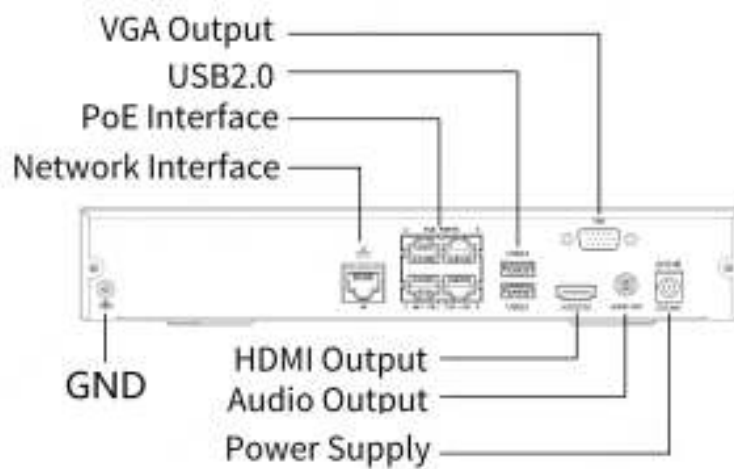

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.