

DirectIP™ 10-port PoE Switch

DH-2010P NEW


- Individual port for data transmission to DirectIP™ NVR
- PoE (IEEE 802.3af, IEEE 802.3at) compliant
- Maximum per-device PoE delivery of 70W available for 1~8 RJ45 ports
- Central power control for greater network utility
- Supports 10 x RJ45 ports



SPECIFICATIONS

SYSTEM	
CPU	Embedded MIPS
System Memory	256MB SDRAM, 32MB Flash
Switching Capacity	5.6Gbps
CONNECTIVITY	
Copper Service Port	8 RJ45 Connectors (10/100BASE-T)
Copper Uplink Port	2 RJ45 Connectors (10/100/1000BASE-T)
Optical Uplink Port	none
PoE POWER	
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
PD Connection	Up to 8 IEEE 802.3af PDs or up to 2 IEEE 802.3at PDs
PSE Power Budget	70W
GENERAL	
Dimensions (W x H x D)	280mm x 44mm x 180mm (11.0" x 1.7" x 7.1")
Weight	1.35Kg (2.97lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
Power Input	AC100-240V, 1.2~0.6A, 50/60Hz
Power Consumption	85W
Certifications	FCC,CE,KC,UL,CB

DIMENSIONS

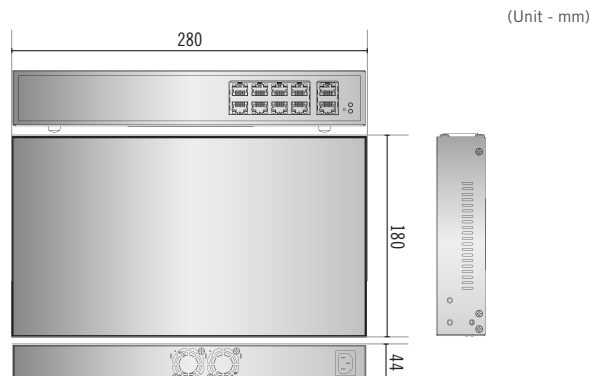

DirectIP™ 18-port PoE Switch

DH-2018P NEW

- Individual port for data transmission to DirectIP™ NVR
- PoE (IEEE 802.3af, IEEE 802.3at) compliant
- Maximum per-device PoE delivery of 140W available for 1~16 RJ45 ports
- Central power control for greater network utility
- Supports 16 x RJ45 ports



SPECIFICATIONS

SYSTEM	
CPU	Embedded MIPS
System Memory	256MB SDRAM, 32MB Flash
Switching Capacity	7.2Gbps
CONNECTIVITY	
Copper Service Port	16 RJ45 Connectors (10/100BASE-T)
Copper Uplink Port	2 RJ45 Connectors (10/100/1000BASE-T)
Optical Uplink Port	none
PoE POWER	
Supported Standards	IEEE 802.3af-2003 / IEEE 802.3at-2009
PD Connection	Up to 16 IEEE 802.3af PDs or up to 4 IEEE 802.3at PDs
PSE Power Budget	140W
GENERAL	
Dimensions (W x H x D)	430mm x 44mm x 180mm (17.0" x 1.7" x 7.1")
Weight	2.05Kg (4.52lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
Power Input	AC100-240V, 1.2~0.6A, 50/60Hz
Power Consumption	160W
Certifications	FCC.CE.KC.UL.CB

DIMENSIONS

