

Network Video Recorder

NVR302-E-B Series



Key Features


- Support Ultra 265/H.265/H.264 video formats
- 9/16-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 10TB for each disk
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications


Model	NVR302-09E-B		NVR302-16E-B	
Video/Audio Input				
IP Video Input	9-ch		16-ch	
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	90Mbps		160Mbps	
Outgoing Bandwidth	180Mbps		320Mbps	
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz			
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	9-ch		16-ch	
Corridor Mode Screen	3/4/5/7/9		3/4/5/7/9/10/12/16	
Decoding				
Decoding format	Ultra 265, H.265, H.264			
Live View/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	3 x 12MP@25, 4 x 4K@30, 9 x 4MP@25, 16 x 1080p@30			
Hard Disk				
SATA	2 SATA interfaces			
Capacity	up to 10TB for each disk			
Smart				
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking			
VCA Search	Face search, Behavior search			
Statistical Analysis	People counting			
External Interface				
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces			
Serial Interface	1 x RS485			
USB Interface	Front panel: 1 x USB2.0 Rear panel: 1 x USB2.0, 1 x USB3.0			
Alarm In	8-ch			
Alarm Out	2-ch			
General				
Power Supply	12V DC Power Consumption: ≤ 20 W(without HDD)			
Working Environment	-10℃ ~ + 55℃ (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)			
Dimensions(W×D×H)	380mm × 315mm ×46mm (15.0"× 12.4" ×1.8")			

Weight (without HDD)	≤ 2.48 Kg (5.47 lb)
------------------------	----------------------

Dimensions

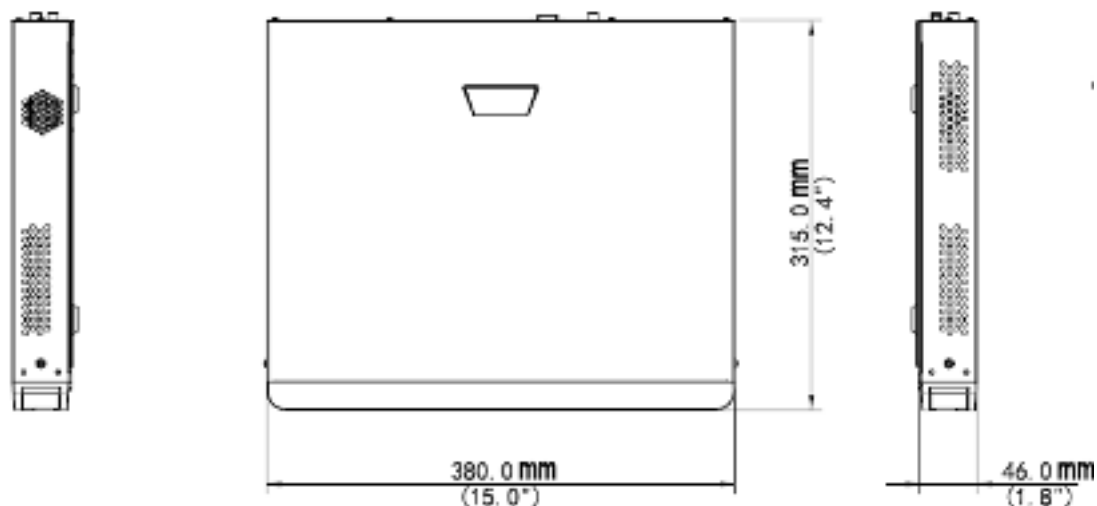

Rear Panel

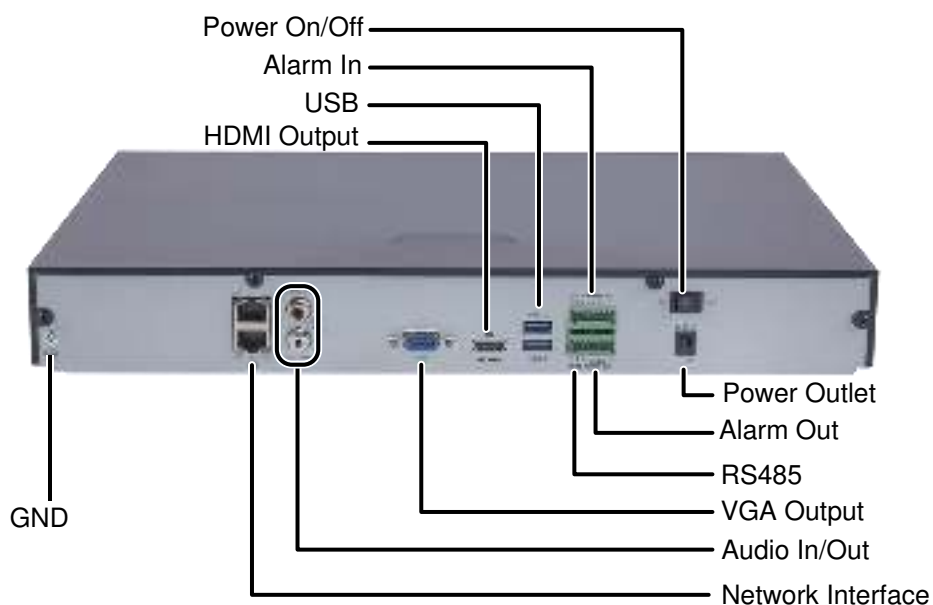

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.