

H2W2GR1

Network TDN Low-Light
WDR 2MP Micro Dome Camera



HD ONVIF® | SGG

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/2.8" 2Megapixel progressive scan CMOS
NUMBER OF PIXELS (H × V)	2MP - 1920x1080
MINIMUM ILLUMINATION	Colour: 0.001Lux @f/2.0, B/W: 0Lux @f/2.0 (IR on)
S/N RATIO	50 db minimum
ELECTRONIC SHUTTER SPEED	Auto/Manual, 1/3~1/100000s
IR DISTANCE	15m
DAY/NIGHT	Mechanical ICR (ON / OFF / AUTO selectable)
BACKLIGHT COMPENSATION	BLC / HLC / WDR / SAC(Scene Adaptive Control)
WIDE DYNAMIC RANGE (WDR)	120dB (50/60fps off)
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region
GAIN CONTROL	Auto/Manual
NOISE REDUCTION	3D Noise Reduction (ON / OFF selectable)
PRIVACY MASKING	Up to 4 configurable areas
DEFOG	Auto/Manual/Off
LENS	2.8mm, F2.0
ANGLE OF VIEW	H: 110°, V: 58°
AUDIO/TWO-WAY	1 Built-in Mic
ETHERNET	RJ-45 (10/100Base-T)
IP SPECIFICATIONS	
VIDEO COMPRESSION	H.265+, H.265, H.264 and MJPEG Bit rate control (CBR and VBR)
RESOLUTION	16:9 1080p (1920x1080)/ 720p (1280x720)
	4:3 1.3M (1280x960)/VGA (640x480)
	OTHER D1 (704x576/704x480)/ CIF (352x288/352x240)
FRAME RATE	MAIN STREAM 1080P(1~50/60fps WDR off)
	SUB STREAM D1 (1~50/60fps WDR off)
	THIRD STREAM 1080P(1-25/30fps) Simultaneous Main stream and Third stream at 1080P (Main stream +Third stream <=68fps, WDR off, 2nd stream off)
AUDIO COMPRESSION	G.711a/ G.711Mu/ AAC/G.726
AUDIO STREAM	Simplex
SUPPORTED WEB BROWSERS	IE11/Chrome (with application)/Firefox (earlier 52.0 version)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
SUPPORTED PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; SNMP

IP SPECIFICATIONS (CONT.)	
COMPATIBILITY	ONVIF Profile S, G and Q
MAXIMUM USERS ACCESS	20 users
SECURITY	User account and password protection HTTPS, IP Filter, IEEE 802.1x, Digest authentication, User access log, TLS1.2, AES-256, SSH/Telnet closed, FTP disabled, PCI-DSS compliance, Hardware chipset for private key
BUILT-IN ALARM & EVENT	EVENT TYPE Motion Detection/Video Tampering/Face Detection/SD Card Error/SD Card Capacity Warning/Audio Detection/ Object Abandoned/Object Missing/Tripwire/Intrusion
	EVENT LINKAGE Recording on SD card, Email, Snapshot
	EVENT OUTPUT ONVIF, ISOM
MICRO SD	Micro SDHC Capacity Max 32GB Micro SDXC Capacity Max 128GB
MICRO SD FUNCTION	- Event trigger recording - Continuous and scheduled recording - Automatic recording when network fails
LANGUAGES SUPPORTED	English, Arabic, Czech, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Turkish
ELECTRICAL	
POWER SUPPLY	PoE(802.3af) Class 0/12VDC
POWER CONSUMPTION	Max 4.4W
MECHANICAL	
DIMENSIONS	109.9 x 55.0mm (4.33 x 2.17in.)
WEIGHT	Product weight: 334g (0.74lb) Package Weight: 730g (1.61lb)
CONSTRUCTION	Die-cast aluminum housing with powder coat
CONSTRUCTION COLOUR	RAL 9003 (White)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30°C to 60°C (-40°F to 140°F)
RELATIVE HUMIDITY	0% to 95%, non-condensing
GORE VENTS	Yes
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK10
REGULATORY	
EMISSIONS	FCC Part 15, CE (EN 55032); Complies with RCM (AS/NZS)
IMMUNITY	CE (EN 50130-4)
SAFETY	North America UL Listed to UL/CSA 60950-1, CE (EN 60950-1)
ROHS	EN50581

Network TDN Low-Light WDR 2MP Micro Dome Camera


RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION		HOUSING AND MOUNTS		
ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (http://www.security.honeywell.com/hota/) to learn more about our open and integrated solutions.		HEPM		Micro Dome Pendant Adapter
		HDZCM1		Ceiling Mount Bracket
		HLR1001		IP over Coax Converter
		HPOE3X		3X Long Distance POE Switch
		GANG BOX/ DOUBLE GANG BOX/4S BOX		Gang Box/ Double Gang Box/4S Box (need to purchase from market)
		HEJB		Junction Box

ORDERING

H2W2GR1	Network TDN Low Light WDR IR Micro Dome Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 2.8mm, PoE, H.265+
---------	--

DIMENSIONS

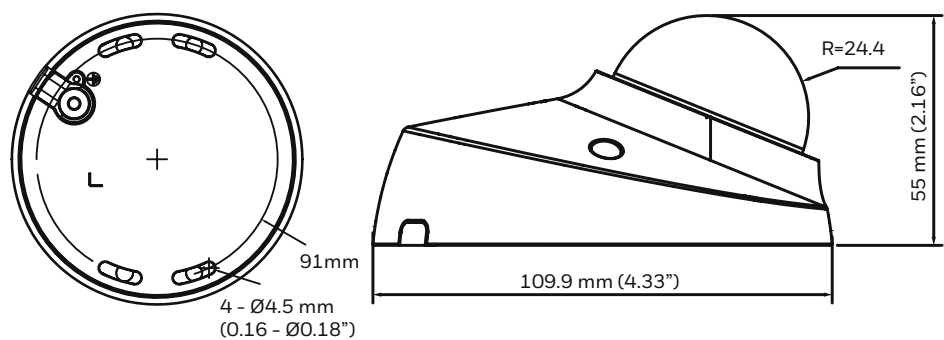

For more information
www.honeywell.com/security/uk

Honeywell Security
Aston Fields Road
Whitehouse Industrial Estate
Runcorn, Cheshire, WA7 3DL
United Kingdom
Tel: +44 (0)8448 000 235

Honeywell Security Office
Emaar Business Park, Sheikh Zayed Road
Building No. 2, 2nd floor, 201
Post Office Box 232362
Dubai, United Arab Emirates
Tel: +971 44541704
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-H2W2GR1-02-UK(0618)DS-Z
© 2018 Honeywell International Inc.

Honeywell