

4MP EasyStar Mini Fixed Bullet Network Camera

IPC2124LR5-DUPF28(40)M-F



Key Features

Optics

- Day/night functionality
- Smart IR, up to 50m (164ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- ROI (Region of Interest)

Network

- ONVIF Conformance


Structure

- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- IP67

Specifications

	IPC2124LR5-DUPF28M-F			IPC2124LR5-DUPF40M-F		
Camera						
Sensor	1/3", 4.0 megapixel, progressive scan, CMOS					
Lens	2.8mm@F1.6			4.0mm@F1.6		
DORI Distance	Lens (mm)	Detect (m)	Observe (m)		Recognize (m)	Identify (m)
	2.8	63	25.2		12.6	6.3
	4.0	90	36		18	9
Angle Of View (H)	105.3°			79.7°		
Angle Of View (V)	57°			41.6°		
Angle Of View (O)	136.9°			98.0°		
Adjustment Angle	Pan: 0° ~ 360°		Tilt: 0° ~ 90°		Rotate: 0° ~ 360°	
Shutter	Auto/Manual, 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.005Lux (F1.6, AGC ON) 0Lux with IR					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital Noise Reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 50m (164ft) IR range					
WDR	120db					
Video						
Video Compression	Ultra 265, H.265, H.264, MJPEG					
H.264 Code Profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream: 4MP (2688*1520), Max 25fps; Sub Stream: 720P (1280*720), Max 25fps					
HLC	Supported					
BLC	Supported					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 4 areas					
ROI	Up to 4 areas					
Motion Detection	Up to 4 areas					
Network						
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL					
Compatible Integration	ONVIF (Profile S, Profile T), API					
Interface						
Network	10/100M Base-TX Ethernet					
General						
Power	DC 12V±25%, PoE (IEEE 802.3af)					
	Power consumption: Max 6W					
Dimensions(L × W × H)	191.3×72.6×70.9mm (7.5"×2.9"×2.8")					
Weight	0.5kg (1.1lb)					
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)					

Dimensions

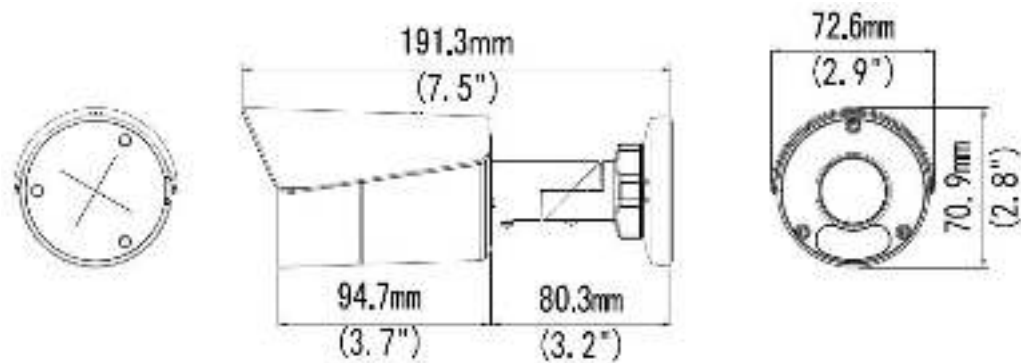

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.