

DS-3WF0AC-2NT

Elevator Wireless Bridge

DS-3WF0AC-2NT wireless bridge can be applied to elevator internal CCTV system. It can transfer CCTV data through wireless signal instead of cable, which can reduce the cost.

Feature and Function

- Up to 100 m wireless transmission distance
- Special design for CCTV scenario with smooth video transmission
- Easy configuration through web interface
- Dual power supply mode options makes installation more flexible
- Signal indicator helps to find the best installation position and direction
- 300 Mbps 802.11n wireless
- Built-in 8 dBi 2 × 2 MIMO Antenna
- Ideal solution for elevator connection

Package Content



- DS-3WF0AC-2NT
- Power Adapter (12V, 1A)
- PoE Injector
- Pole Mounting Straps
- Quick Start Guide




Specification

Model	DS-3WF0AC-2NT
Wireless	
Standard	IEEE 802.11 b/g/n
Operating frequency	2412~2472 MHz (Note: Available channel may vary depending on local regulations)
Antenna	Internal, Gain 8 dBi, Horizontal: 60° Vertical: 30°
Output Power	20 dBm (Note: Maximum output power may vary in different channels depending on local regulations)
Receive sensitivity	-92±1.5 dBm@1 Mbps, -72±1.5 dBm@ MSC7
Wireless Link Rate	300 Mbps
Maximum power consumption	2.8 W
Installation	Pole
Hardware	
Power supply	12 V/1 A passive PoE or 12 V/1 A DC
Passive PoE power supply distance	Up to 60 meters with Cat.5e or better
Interface	10/100 M Base-TX × 1
Operating Temperature	-30°C ~ 55°C (-22°F ~131°F)
Storage Temperature	-30°C ~ 70°C (-22°F ~158°F)
Operating Humidity	10% - 90% RH (non-condensing)
Dimension	193.5mm × 80mm × 67.5mm
LED Indicator	1 × Power LED, 1 × LAN port LED, 3 × Signal strength LEDs(LED1, LED2, LED3)
Net Weight	0.69 kg
Gross Weight	0.77 kg
Software	
Encryption	WPA-PSK/WPA2-PSK
Security	IP/MAC filter, SSID hidden
Network protocol	TCP/UDP/ARP/ICMP/HTTP/NTP
Management and Logs	NTP, Syslog, SNMP
Configuration Management	Support web configuration, Support SNMP management
Firmware update	Support update firmware by Web page
Bandwidth	20 M/40 MHz

Physical Interface

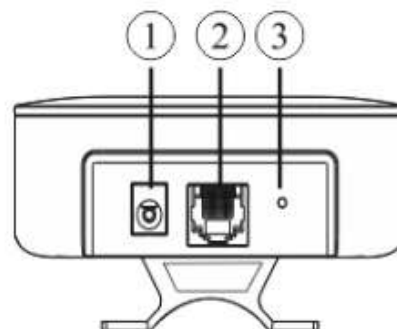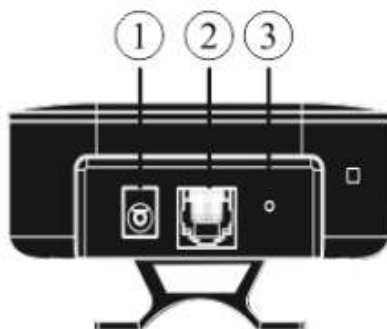


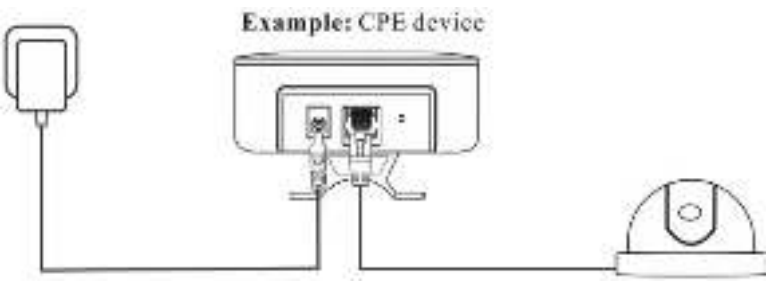SN	Port/Button	Description
①	12V	Power jack. Use the included power adapter to connect this jack to a power source for power supply.
②	POE/LAN	This port is used to supply power over the Ethernet cable and transmit data. - To supply power to the device over the Ethernet cable, connect this port to the PoE port of the included PoE injector. Example: AP device  - When the device is powered on using the included DC power adapter, you can connect this port to an Ethernet device for data transmission. Example: CPE device 
③	Reset	Reset Button. After the device is powered on for about 1 minute, hold down this button for about 8 seconds. When all the LED indicators on the device light up, the device is restored to factory settings.


Available Model

- DS-3WF0AC-2NT in pairs

Dimension (unit: mm)

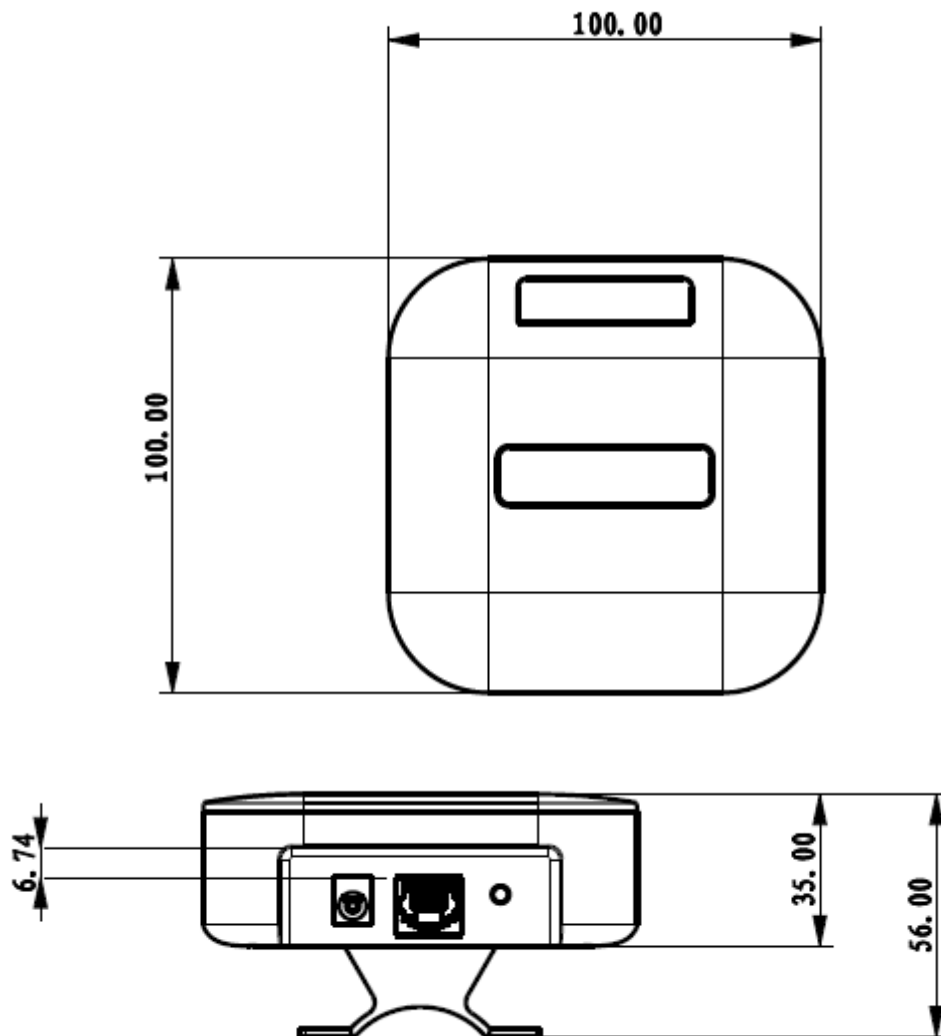

Typical Application

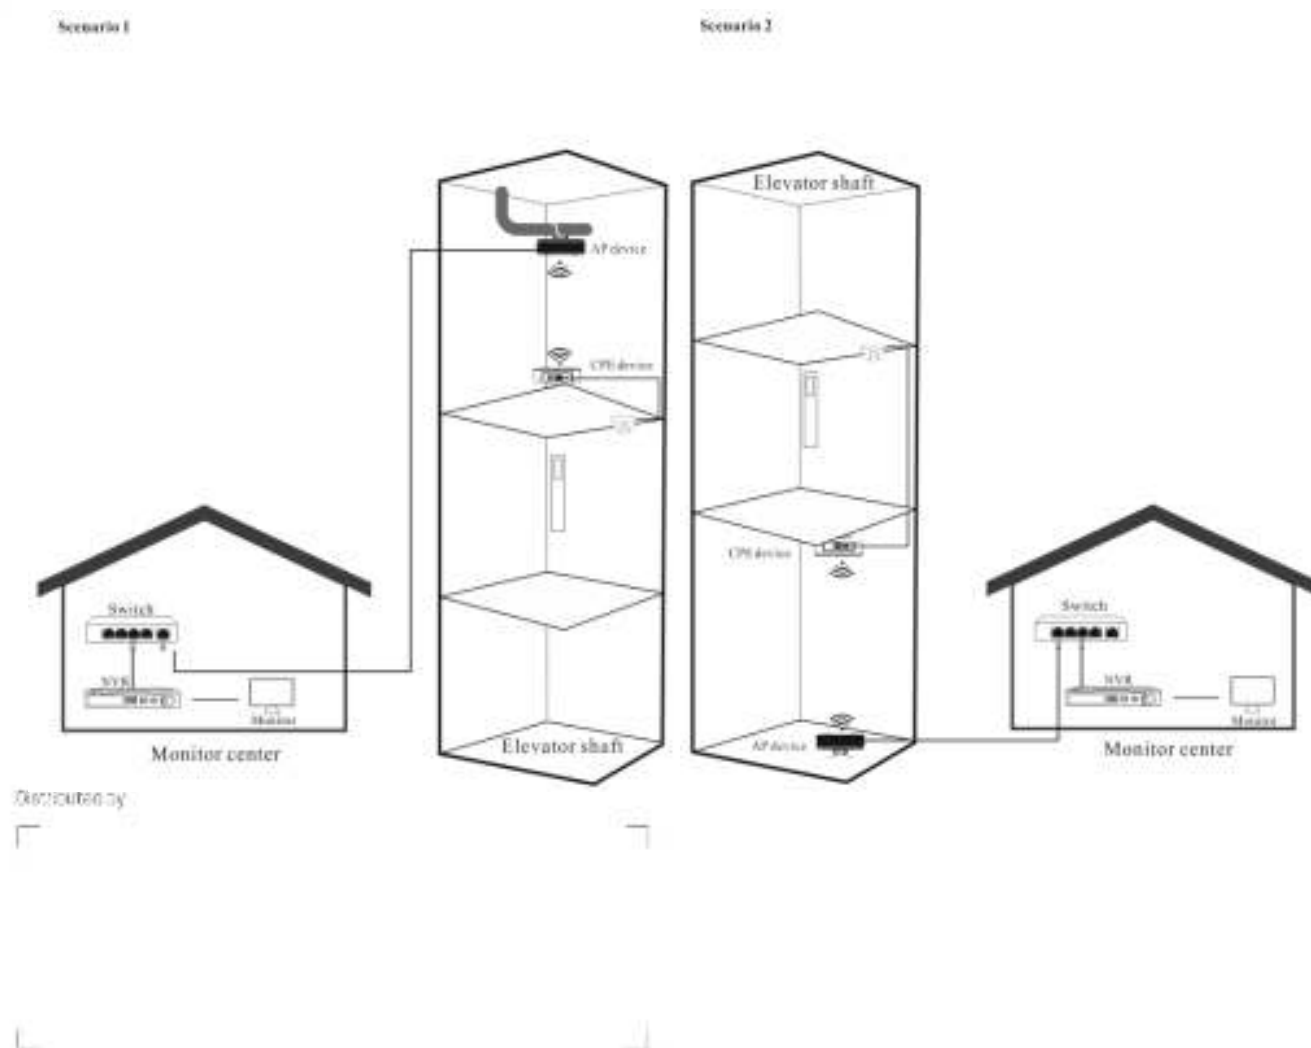

HIKVISION

Headquarters

No.555 Wuyang Road, Wuyang District,
Hangzhou 310051, China
T +86-571-8007-5889
export@hikvision.com

Hikvision USA
T +1-909-885-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-9595-4233
sales.au@hikvision.com

Hikvision India
T +91-22-28496600
sales@premahikvision.com

Hikvision Canada
T +1-866-200-1530
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9049
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6962
info.it@hikvision.com

Hikvision Brazil
T +55-11-3318-0250
latam.support@hikvision.com

Hikvision Turkey
T +90-21255217070-7070
sales.tr@hikvision.com

Hikvision Malaysia
T +6011-4058-2913
sales.my@hikvision.com

Hikvision UK & Ireland
T +44-208-802140
sales.uk@hikvision.com

Hikvision South Africa
Tel +27-101-3351172
sales.africa@hikvision.com

Hikvision France
T +33011-85-334-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730967
kazakhstan@hikvision.com

Hikvision Vietnam
T +84-972-00889
sales.vn@hikvision.com

Hikvision UAE
T +971-4-4432080
sales.me@hikvision.com

Hikvision Singapore
T +65-6564-4716
sg@hikvision.com

Hikvision Spain
T +34-91-737-15-55
info.es@hikvision.com

Hikvision Tashkent
T +998-77-1238-9488
tsh@hikvision.com

Hikvision Hong Kong
T +862-2151-1701
hk@hikvision.com

Hikvision Russia
T +7-495-669-67-88
sales.ru@hikvision.com

Hikvision Korea
T +82-1003-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-61-80
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933758
Sales.indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com