

DS-D5065UC-C 65-inch LCD Monitor



- Designed for surveillance, high reliability and stability
- 65" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, RJ45, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation




▪ Specification

Model		DS-D5065UC-C
Display	Screen Size	65"
	Active Display Area	1428.48 (H) mm × 803.52 (V) mm
	Resolution	3840 × 2160@60 Hz
	Backlight	LED
	Pixel Pitch	0.372 (H) mm × 0.372 (V) mm
	Brightness	350 cd/m ²
	Viewing Angle	178° (H) / 178° (V)
	Color Depth	8 bit
	Contrast Ratio	1200:1
	Response Time	8 ms
	Refresh Rate	60 Hz
	Haze	1%
	Reliability	7 × 24 H
	Color Gamut	72% NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, HDMI2.0 × 1, VGA × 1, Audio in × 1
	Video & Audio Output	Speaker (6Ω 7W) × 2
	Data Transmission Interface	USB × 1
	Control Interface	RS232 × 1
Power	Power Supply	100~240 VAC, 50/60Hz
	Power Consumption	≤ 190 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 80% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	200 mm × 200 mm (4 × M6-25 mm)
	Bezel Width	8.24 mm (top/left/right), 22.62 mm (bottom)
	Product Dimensions (W × H × D)	Without stand: 1449.6 mm × 838.38 mm × 79.6 mm (57.07" × 33.01" × 3.13") With stand: 1449.6 mm × 883.35 mm × 283.4 mm (57.07" × 34.78" × 11.16")
	Package Dimensions (W × H × D)	1600 mm × 995 mm × 175 mm (62.99" × 39.17" × 6.89")
	Net Weight	Without stand: 18.6 kg (41.01 lb) With stand: 18.7 kg (41.23 lb)
	Gross Weight	Without stand: 24.4 kg (53.79 lb) With stand: 24.5 kg (54.01 lb)
	Packing List	Power cable × 1, remote control × 1, user manual × 1, HDMI cable × 1, base bracket × 1
	Remarks	If the appearance and parameters in this specification vary from the actual product, the later prevails. You can also consult local sale staff.

▪ Available Model


DS-D5065UC-C

▪ Physical Interface

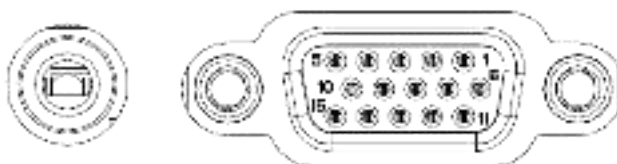

AUDIO

VGA



RJ45


USB


HDMI 1

HDMI 2

Interface	Interface	Interface	Interface
HDMI-IN1	HDMI1.4 Input, 3840 × 2160@30Hz	VGA	VGA Input, 1920 × 1080@60Hz
HDMI-IN2	HDMI2.0 Input, 3840 × 2160@60Hz	AUDIO-IN	Audio Input
USB	USB2.0 Input		

Dimension

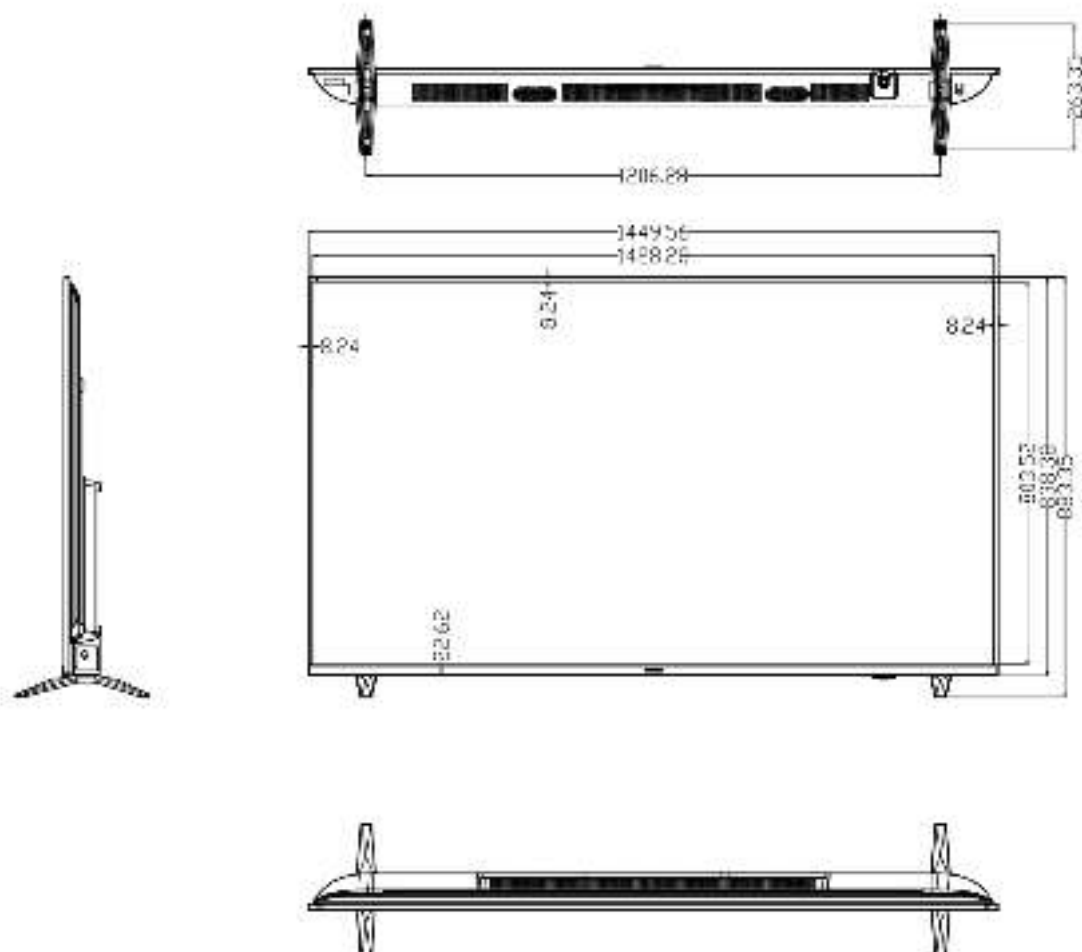

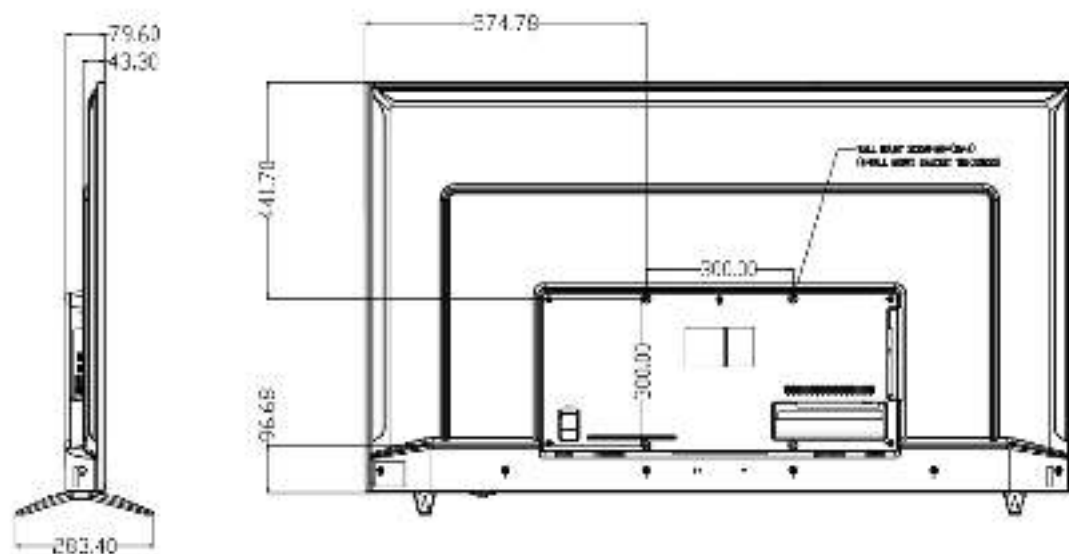

Distributed by

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou, 310051, China
T +86-571-8607-5008
overseasbusiness@hikvision.com

HIKVISION USA
T +1-909-865-0400
sales.usa@hikvision.com

HIKVISION Australia
T +61-2-8699-4233
sales.au@hikvision.com

HIKVISION India
T +91-22-28469000
sales@pmahikvision.com

HIKVISION Canada
T +1-800-380-6890
sales.canada@hikvision.com

HIKVISION Thailand
T +662-275-3646
sales.thailand@hikvision.com

HIKVISION Europe
T +31-23-3642770
sales.eu@hikvision.com

HIKVISION Italy
T +39-0439-6802
info.it@hikvision.com

HIKVISION Brazil
T +55-11-3316-0850
latam.support@hikvision.com

HIKVISION Turkey
T +90-216-521-7070-7074
sales.tr@hikvision.com

HIKVISION Malaysia
T +601-7652-2413
sales.my@hikvision.com

HIKVISION UK & Ireland
T +41320-902140
sales.uk@hikvision.com

HIKVISION South Africa
T +27-11-010361172
sales.africa@hikvision.com

HIKVISION France
T +33-01-85-330-450
info.fr@hikvision.com

HIKVISION Kazakhstan
T +7-727-8730667
nikksp@hikvision.kz

HIKVISION Vietnam
T +84-974270898
sa.cdv@hikvision.com

HIKVISION UAE
T +971-4-4432090
sales.me@hikvision.com

HIKVISION Singapore
T +65-6884-4718
sg@hikvision.com

HIKVISION Spain
T +34-91-737-16-55
info.es@hikvision.com

HIKVISION Tashkent
T +99-91-1238-9438
info@hikvision.uz

HIKVISION Hong Kong
T +852-2151-1701
info.hk@hikvision.com

HIKVISION Russia
T +7-495-663-67-00
sales.ru@hikvision.com

HIKVISION Korea
T +82-10151-731-8617
sales.korea@hikvision.com

HIKVISION Poland
T +48-22-463-01-50
info.pl@hikvision.com

HIKVISION Indonesia
T +62-21-2932-759
Sales.indonesia@hikvision.com

HIKVISION Colombia
sales.colombia@hikvision.com