

8 MP (4K) IR Minidome IP Cameras

H4D8PR1

Honeywell is taking quality and reliability to the next level with the new Performance Series 4K Ultra HD rugged IP minidome cameras. The Honeywell TDN Ultra HD IR minidome cameras offer incomparable picture clarity, hassle-free flexible system integration, and secure data transmission—and they install easily too!

Ultra HD 4K Image Quality

- Ultra HD 8 MP (4K) 15 fps image with a 1/2.5" 8 megapixel progressive scan CMOS, or full HD 3 MP 25/30 fps image
- Digital WDR (DWDR) ensures glare-free images
- True Day/Night provides vivid color images by day and clear black-and-white images at night with ICR
- Excellent low-light performance with 3D noise reduction, saving storage and bandwidth together with H.265 codec

Flexible Surveillance Solution

- 4.0 mm, F1.6, fixed lens
- H.265, H.264 and MJPEG codec, triple stream support
- IR LEDs provide up to 30 m (100 ft.) of illumination in dimly lit or nighttime scenes (depending on scene reflectance)
- Smart IR technology provides even distribution of IR
- Waterproof (IP66) and IK10 impact-resistant camera housing
- -30°C to 60°C (-22°F to 140°F) working temperature
- Security features include individual signed certificates and data encryption
- Cameras can be retrofitted on many existing DVR/NVR installations without requiring additional storage

Onboard Video Storage

- Supports up to 128 GB microSDHC card for local video storage on events, continuous, or schedule, or with network interruption



Easy to Install and Use

- Built-in PoE (Power over Ethernet 802.3af) eliminates separate power supply and associated wiring; 12 VDC input where PoE power is unavailable
- ONVIF Profile S and G compliant
- Included accessories: security screw driver (allen key), mounting screws, wall anchors, and mounting template

Market Opportunities

These fully featured attractive cameras are perfect for outdoor installations that require excellent picture quality at minimal bandwidth while offering maximum protection against dust, dirt, and water. Boasting a sleek modern design and offering 4K high definition images, the cameras are suited for a wide range of applications.


FEATURES AND BENEFITS

- | | | | | |
|--|--|---|--|---|
| • Ultra HD 4K/8 MP resolution at 15 fps or 3 MP at 25/30 fps | • 30 m (100 ft.) IR distance, depending on scene reflectance | • Excellent low light performance with down to 0 lux BW (with IR LEDs on) | • 4.0 mm, F1.6, fixed lens | • ONVIF profile S and G compliant |
| • Up to triple stream support | • 1/2.5" 8 megapixel progressive scan CMOS imager | • Choice of 12 VDC or PoE (802.3af) power inputs | • Corridor mode viewing capability | • Global language support with 12 languages for all QIGs, and 2 languages for the Web GUI |
| • Digital WDR | | | • On board camera storage: up to 128 GB microSD card | |


8 MP (4K Ultra HD) IR Minidome IP Cameras

FEATURES CONTINUED

The camera can be configured to automatically detect and respond to events such as motion in the scene, alarm inputs, network failure, and/or camera tampering. Automated responses include: sending a notification through email and/or HTTP; sending a still image of the event through email and/or FTP; and recording a video clip of the event to a configured microSDHC card. Setup can be done through a web client.

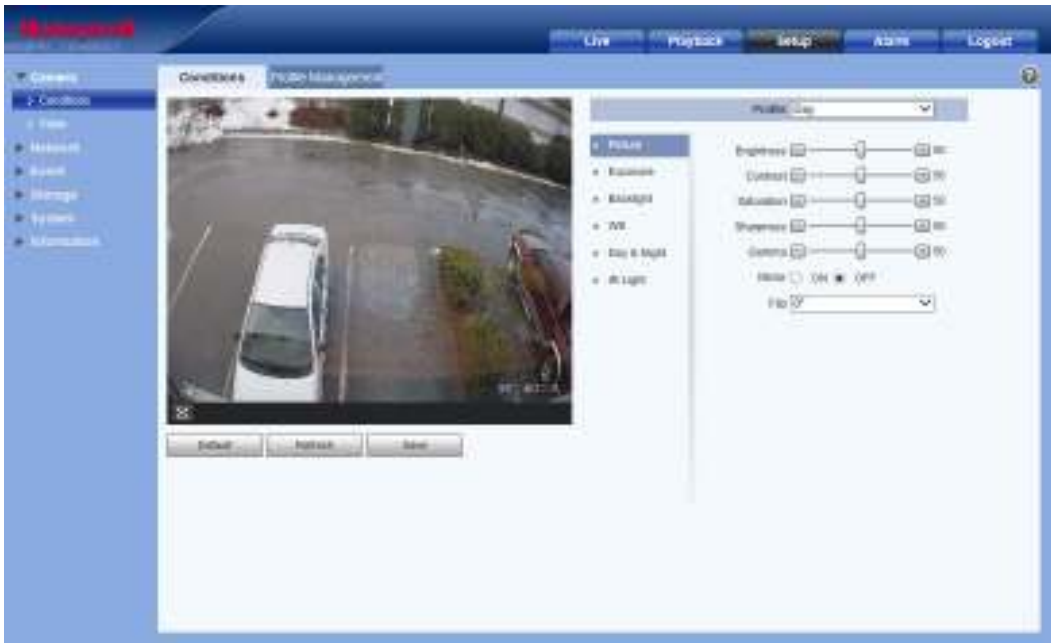

DIMENSIONS

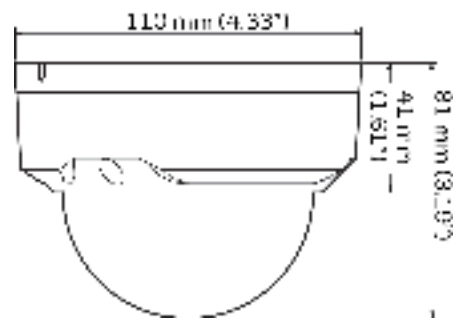

8 MP (4K Ultra HD) IR Minidome IP Cameras

Technical Specifications

OPERATIONAL		
VIDEO STANDARD		NTSC/PAL
SCANNING SYSTEM		Progressive scan
IMAGE SENSOR		1/2.5" 8 MP Progressive CMOS
NUMBER OF PIXELS (H × V)		3840 × 2160
MINIMUM ILLUMINATION		0.1 lux (color)/0 lux (B/W) @ F1.6 (with IR LEDs on)
S/N RATIO		> 42 dB
ELECTRONIC SHUTTER SPEED		Auto, Manual, 1/3(4) – 1/100,000 sec
IR DISTANCE		Up to 100 ft. (30 m), depending on scene reflectance
DAY/NIGHT		Auto (ICR)/Color/BW
BACKLIGHT COMPENSATION		BLC/HLC/DWDR
WIDE DYNAMIC RANGE		Digital WDR (DWDR)
WHITE BALANCE		Auto/Manual/Natural/Street Lamp/Outdoor/Regional Custom
GAIN CONTROL		Auto/Manual
NOISE REDUCTION		3DNR
PRIVACY MASKING		Up to 4 areas
CORRIDOR MODE		Yes
LENS		4.0 mm, Fixed lens, F1.6
ANGLE OF VIEW		Horizontal: 88° Vertical: 48°
AUDIO/TWO-WAY		Line In/Out
ALARM INPUT/OUTPUT		1/1
ETHERNET		RJ-45 (10/100Base-T)
IP SPECIFICATIONS		
VIDEO COMPRESSION		H.265/H.264/MJPEG Bit rate control (CBR and VBR)
RESOLUTION	16:9	8M (3840×2160) / WQHD (2560×1440) / 3M (2304×1296) / 1080p (1920×1080) / 720p (1280×720)
	4:3	1.3M (1280×960)
	OTHER	6M (3072×2048) / 4M (2688×1520) / SXGA (1280×1024) / D1 (704×576/704×480) / CIF (352×288/352×240)
FRAME RATE	MAIN STREAM	8M (3840×2160) 1–15 fps; 6M (3072×2048) 1–20 fps; 4M (2688×1520) / WQHD (2560×1440) 1–25 fps; 3M (2304×1296) or lower resolution at 1–25/30 fps
	SECOND STREAM	D1/CIF up to 25/30 fps
	THIRD STREAM	720p/D1 up to 25/30 fps
AUDIO COMPRESSION		G.726/G.711a/G.711u/AAC
AUDIO STREAM		Full duplex, simplex

SUPPORTED PROTOCOLS*		IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, SSL, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, Bonjour, DNS, DDNS, IEEE 802.1x, QoS, NTP, IP Filter, Multicast, ONVIF
COMPATIBILITY		ONVIF Profile S and G
MAXIMUM USERS ACCESS		20 users
SUPPORTED WEB BROWSERS		Internet Explorer® (11.0+)
SUPPORTED OS		Windows® 7 32-bit/64-bit
SECURITY		Multiple user access levels with enhanced password policy, IP filtering, IEEE 802.1x, Strong Digest authentication for Access permission, Force to HTTPS with secure protocol TLS1.2 only and high strength encrypted algorithm AES-256, SSH/Telnet closed
MICRO SD		Up to 128 GB microSDHC card
MICRO SD FUNCTION		Event trigger recording Continuous and scheduled recording Automatic recording when network fails
LANGUAGES SUPPORTED		English, Japanese
ELECTRICAL		
POWER SUPPLY		PoE (802.3af) Class 0/12 VDC
POWER CONSUMPTION		6.7 W max. (IR LEDs on)
MECHANICAL		
DIMENSIONS		Ø110.0 mm × 81.0 mm (Ø4.3" × 3.2")
PRODUCT WEIGHT		0.406 kg (0.9 lb.)
PACKAGE WEIGHT		0.531 kg (1.2 lb.)
CONSTRUCTION COLOR		White (RAL CODE 9003)
ENVIRONMENTAL		
OPERATING TEMPERATURE		–30°C to 60°C (–22°F to 140°F)
RELATIVE HUMIDITY		Less than 95%, non-condensing
INGRESS PROTECTION		IP66
IMPACT RESISTANCE		IK10
REGULATORY		
EMISSIONS		FCC Part 15B, EN55032
IMMUNITY		EN50130-4, EN55024
SAFETY		EU: EN60950-1 North America UL listed to UL/CSA 60950-1
ROHS		EN50581: 2012


* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

8 MP (4K Ultra HD) IR Minidome IP Cameras

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION

ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.



RECOMMENDED MOUNTS

HQA-BB2	Junction Box (Off-White)
HQA-WK	Wall Mount Bracket (Off-White)
HB34S2-CM	Corner Mount Adapter (Off-White)**
HQA-PM2	Pole Mount Adapter (Off-White)**

RECOMMENDED RECORDERS

HEN081*4	8ch, 2 HDD, 8 PoE, 4K, H.265
HEN161*4	16ch, 2 HDD, 16 PoE, 4K, H.265
HEN321*4	32ch, 2 HDD, 16 PoE, 4K, H.265
HEN162*4	16ch, 4 HDD, 16 PoE, 4K, H.265
HEN322*4	32ch, 4 HDD, 16 PoE, 4K, H.265
HEN642*4	64ch, 4 HDD, 16 PoE, 4K, H.265
HEN163*4	16ch, 8 HDD, 16 PoE, 4K, H.265, RAID 5&6
HEN323*4	32ch, 8 HDD, 16 PoE, 4K, H.265, RAID 5&6
HEN643*4	64ch, 8 HDD, 16 PoE, 4K, H.265, RAID 5&6

* The * = hard drive capacity in TB.

** With a compatible junction box (HQA-BB2).

ORDERING

H4D8PR1	Network TDN Ultra 4K HD IR Rugged Dome Camera, 1/2.5" CMOS, 8 MP, 4.0 mm Fixed Lens, PoE, H.265
----------------	---

For more information

www.honeywell.com/security/uk

Honeywell Security and Fire

Aston Fields Road
Whitehouse Industrial Estate
Runcorn
Cheshire WA7 3DL
Tel: 08448 000 235
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSFV-H4D8PR1-01-UK(0617)DS-R
© 2017 Honeywell International Inc.

Honeywell