

5MP Mini Fixed Bullet Network Camera

IPC2125LR3-PF40(60)M-D



Key Features

Optics

- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265,H.265, H.264, MJPEG
- ROI (Region of Interest)

Network

- ONVIF Conformance


Structure

- Wide temperature range: -30°C to 60°C (-22°F to 140°F)
- Wide voltage range of $\pm 25\%$
- IP67
- 3-Axis

Specifications

	IPC2125LR3-PF40M-D			IPC2125LR3-PF60M-D		
Camera						
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS					
Lens	4.0mm@F2.0			6.0mm@F2.0		
DORI Distance	Lens	Detect(m)	Observe(m)		Recognize(m)	Identify(m)
	4.0mm	60	24		12	6
	6.0mm	90	36		18	9
Angle of View (H)	79.7°			50.5°		
Angle of View (V)	51.8°			35.9°		
Angle of View (O)	98.0°			62.1°		
Adjustment angle	Pan: 0°~360°		Tilt: 0°~90°		Rotate: 0°~360°	
Shutter	Auto/Manual, 1~1/100000 s					
Minimum Illumination	Colour: 0.01 Lux (F2.0, AGC ON) 0 Lux with IR on					
Digital noise reduction	2D/3D DNR					
Day/Night	IR-cut filter with auto switch (ICR)					
S/N	>52dB					
IR Range	Up to 30m (98 ft) IR range					
WDR	DWDR					
Video						
Video Compression	Ultra 265,H.265, H.264, MJPEG					
H.264 code profile	Baseline profile, Main Profile					
Frame Rate	Main Stream:5MP (2592*1944): Max.20fps; Sub Stream: 720P (1280×720): Max.20fps;					
HLC	Supported					
BLC	Supported					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 8 areas					
ROI	Up to 2 areas					
Motion Detection	Up to 4 areas					
Network						
Protocols	IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP, RTP,RTSP,RTCP,DNS,DDNS,NTP,FTP,UPnP,HTTP,HTTPS,SMTP, SSL					
Compatible Integration	ONVIF(Profile S, Profile T), API					
Interface						
Network	10/100M Base-TX Ethernet					
General						
Power	12 V DC±25%, PoE (IEEE802.3 af)					
	Power consumption: Max 4W					
Dimensions (L × W × H)	167.3 × 62.9 ×62.7 mm (6.6" × 2.5" × 2.5")					
Weight	0.37kg (0.81lb)					
Working Environment	-30°C ~ +60°C (-22°F ~ 140°F), Humidity :10%~90% RH(non-condensing)					
Ingress Protection	IP67					

Dimensions

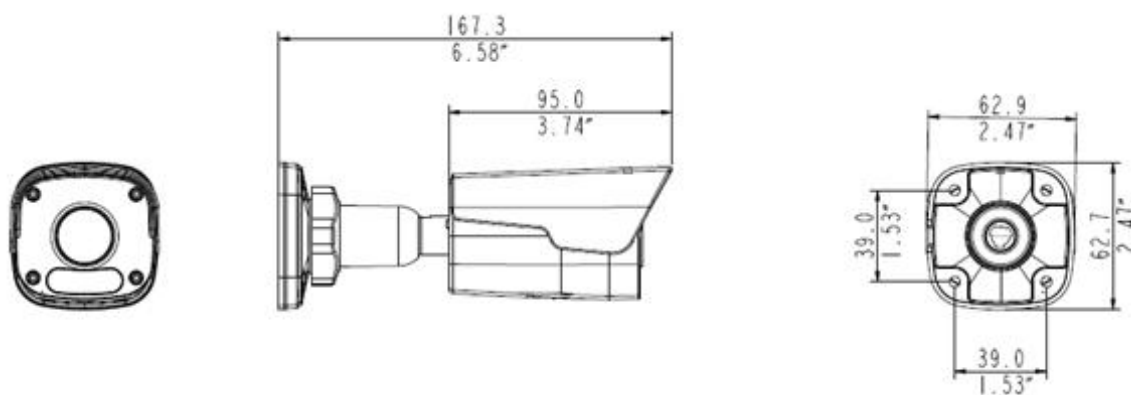

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.