



# iClock9000-G

## Time Attendance Terminal with Access Control Functions

**iClock9000-G** is an innovative product featured with ZK advanced fingerprint recognition technologies. It supports multiple verification methods including fingerprint, card, password, combinations between them and basic access control functions.

User verification is performed in less than 1 second, which streamlines the process of access.

The communication between the **iClock9000-G** and PC is by TCP / IP or USB interface for manual data transfer. Its sleek design fits perfectly in any environment.

---



## Features

- 6,000 Fingerprints, 6,000 Cards and 200,000 Records.
- Multi-languages.
- Communication: TCP/IP, USB-Host, GPRS, Wi-Fi (Optional), 3G (Optional).
- High verification speed.
- Professional firmware and platform make it more flexible.
- Intuitive and stunning UI design.


# Specifications

|                              |                                                                                                                                                                                             |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| User Capacity                | 6,000                                                                                                                                                                                       |
| Fingerprint Capacity         | 6,000                                                                                                                                                                                       |
| ID Card Capacity             | 6,000                                                                                                                                                                                       |
| Record Capacity              | 200,000                                                                                                                                                                                     |
| Display                      | 2.8-inch TFT Screen                                                                                                                                                                         |
| Communication                | TCP/IP, USB-Host, GPRS, Wi-Fi (Optional), 3G (Optional)                                                                                                                                     |
| Standard Functions           | SMS, DTS, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 Input, Photo ID, Multi-verification, 12V Output, RS232 Printer (Optional Cable), ADMS, Work code, 9 Digit User ID |
| Battery Backup               | 2,600 mAh (4h 30min Approx.)                                                                                                                                                                |
| Attendance Log               | Automatically Push to Central Server                                                                                                                                                        |
| Interface for Access Control | 3rd Party Electric Lock, Exit Button, Alarm                                                                                                                                                 |
| Optional Functions           | ID / MF Cards, SSR                                                                                                                                                                          |
| Power Supply                 | DC 12V                                                                                                                                                                                      |
| Verification Speed           | ≤1 Sec.                                                                                                                                                                                     |
| Operating Temp.              | 0°C - 45°C                                                                                                                                                                                  |
| Operating Humidity           | 20% - 80%                                                                                                                                                                                   |
| Dimension                    | 167.5x148.8x32.2 mm (Length*Width*Thickness)                                                                                                                                                |
| Net Weight                   | 300g                                                                                                                                                                                        |
| Warranty                     | 3 Years                                                                                                                                                                                     |

## Dimensions



## Configuration

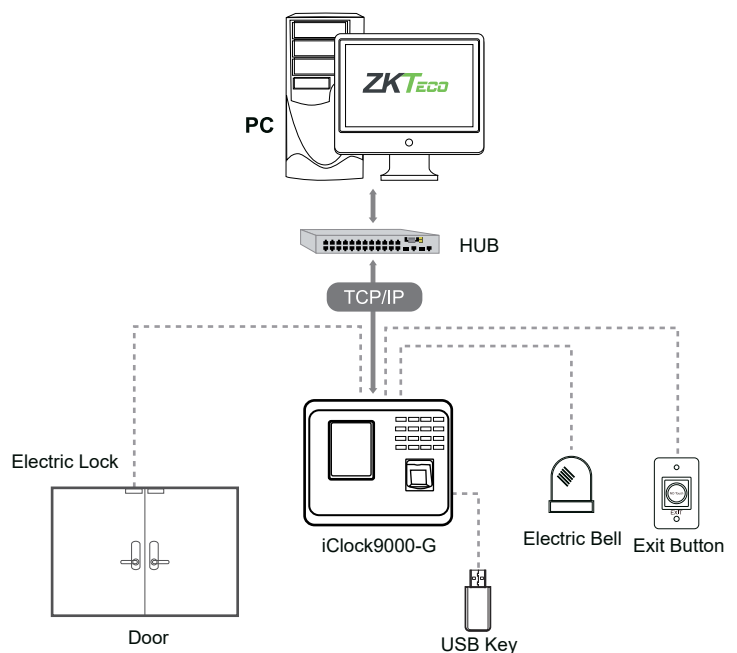

ZKTeco Inc.  
E-mail: [sales@zkteco.com](mailto:sales@zkteco.com)  
[www.zkteco.com](http://www.zkteco.com)

© Copyright 2016. ZKTeco CO., LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

