

DS-D5024FC-C 24-inch Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 2 channels of 8 bit/10 bit LVDS HD (1920*1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Built-in speaker for audio input.
- Support 1 channel BNC surveillance video input with professional surveillance standard BNC interface.
- Multimedia playing of text, image, audio, video, etc.
- Support VESA wall mount.



• Specification

Model		DS-D5024FC-C
Display	Screen Size	23.8"
	Active Display Area	527.04(H) mm x 296.46(V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.0915 (H) mm × 0.2745 (V) mm
	Brightness	250 cd/m ²
	Viewing Angle	178°/178°
	Color Depth	8 bit
	Contrast Ratio	4000 : 1
	Response Time	6.5 ms (typ)
	Refresh Rate	60 Hz
	Haze	25 %
	Reliability	7 × 18 H
	Color Gamut	72%
Interface	Video & Audio Input	HDMI × 1, VGA × 1, Audio In × 1, USB 2.0 × 1, BNC × 1
Power	Power Supply	100-240 VAC, 50/60 Hz
	Power Consumption	≤ 22 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	75 mm × 75 mm, 4-M6 × 6 screw holes
	Bezel Width	1.9 mm (top/left/right), 23.55 mm (bottom)
	Product Dimensions (W × H × D)	With base: 539.1 (W) mm × 433.199 (H) mm × 43.78 (D) mm (21.22" × 17.05" × 1.88") Without base: 539.1 (W) mm × 328.325 (H) mm × 43.78 (D) mm (21.22" × 12.93" × 1.88")
	Package Dimensions (W × H × D)	650 (W) mm × 475 (H) mm × 135 (D) mm (25.5" × 18.7" × 5.31")
	Net Weight	3.6 ± 0.5 kg (7.9 ± 1.1 lb.)
	Gross Weight	5.0 ± 0.5 kg (11.0 ± 1.1 lb.)
	Packing List	Monitor × 1, AC power cable × 1, base bracket × 1, user manual × 1, quick start guide × 1, HDMI cable × 1

	Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.
--	---------	--


▪ Available Model

DS-D5024FC-C

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI digital signal input	VGA	VGA analog signal input
AC 100-240V~	100-240 VAC power supply	AUDIO IN	3.5mm Audio Input
USB	USB 2.0	BNC	CVBS Signal Input

▪ Dimension

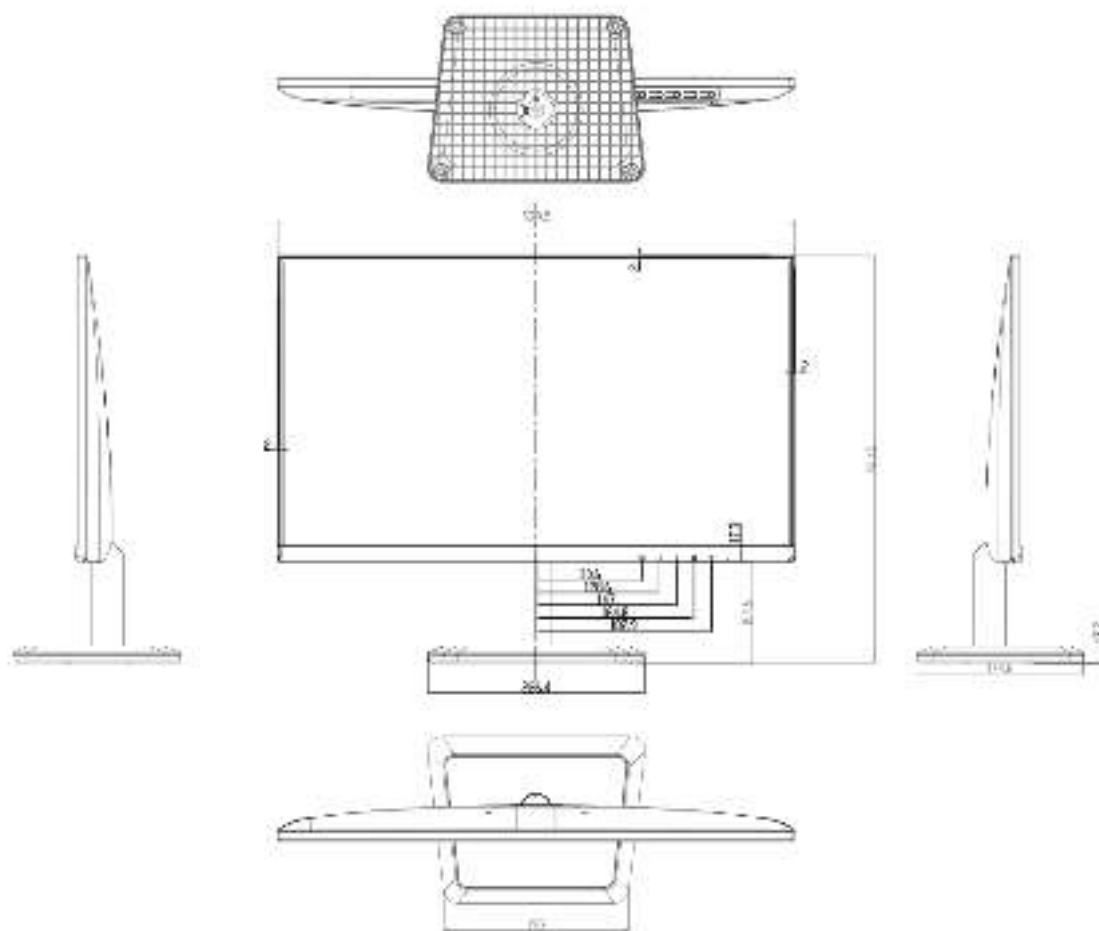

- Accessory
- Optional

DS-DM1940W Wall-mounted Bracket



Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou, 310051, China
T +86-571-8607-5008
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-965-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-9699-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pmahikvision.com

Hikvision Canada
T +1-800-380-6890
sales.canada@hikvision.com

Hikvision Thailand
T +66-275-3646
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-3642770
sales.eu@hikvision.com

Hikvision Italy
T +39-0439-6802
info.it@hikvision.com

Hikvision Brazil
T +55-11-3316-0850
latam.support@hikvision.com

Hikvision Turkey
T +90-12163217070-7079
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +41320-902140
sales.uk@hikvision.com

Hikvision South Africa
T +27-1101-0361172
sales.africa@hikvision.com

Hikvision France
T +33-01-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-8730667
nikolapavlov@hikvision.kz

Hikvision Vietnam
T +84-979270898
sa.gu.vi@hikvision.com

Hikvision UAE
T +971-4-4432090
sales.me@hikvision.com

Hikvision Singapore
T +65-6884-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9432
info@hikvision.uz

Hikvision Hong Kong
T +852-2151-1700
info.hk@hikvision.com

Hikvision Russia
T +7-495-660-67-00
sales.ru@hikvision.com

Hikvision Korea
T +82-1051-731-8617
sales.korea@hikvision.com

Hikvision Poland
T +48-22-463-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2932759
Sales.indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com