

UPS-DP/S





Main features

- Power supply: 220 V.
- Output power: +12 V.
- Maximum short-time load current: 2.5 A.
- Case: Metal.
- Operating temperature: -40 – +60 °C.
- Protection class: IP 30C.
- Device connection type: Multi-apartment door panel.
- Dimensions: 180 × 190 × 72 mm.

UNINTERRUPTIBLE POWER SUPPLY UNIT

UPS-DP/S




Full User Manual
wiki.bas-ip.com

Device description

Uninterruptible power supply unit for multi-apartment outdoor panels with built-in control of electromagnetic and electromechanical lock.

It can also be used with individual panels or the concierge monitor.

Appearance

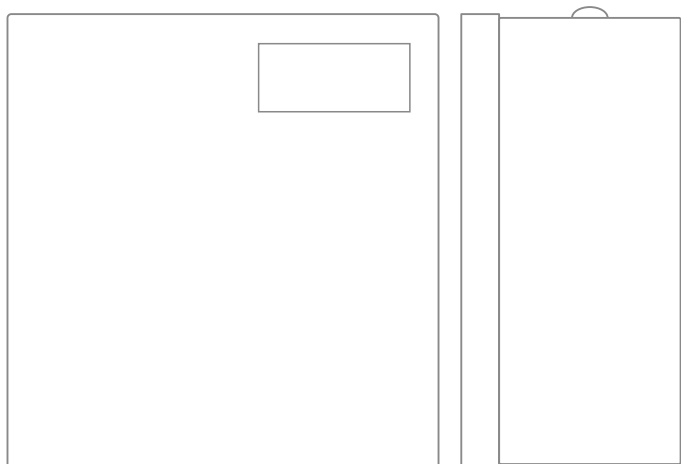

Completeness check of the product

Before installing the uninterruptible power supply unit, be sure to check that it is complete and all components are available.

The power unit kit includes:


Uninterruptible power supply unit	1 pc
Manual	1 pc

Electrical connection

After verifying the device's completeness, you can switch to the power unit connection.

To connect power supply unit you will need:

- Cable RVV 2x1,5 mm².

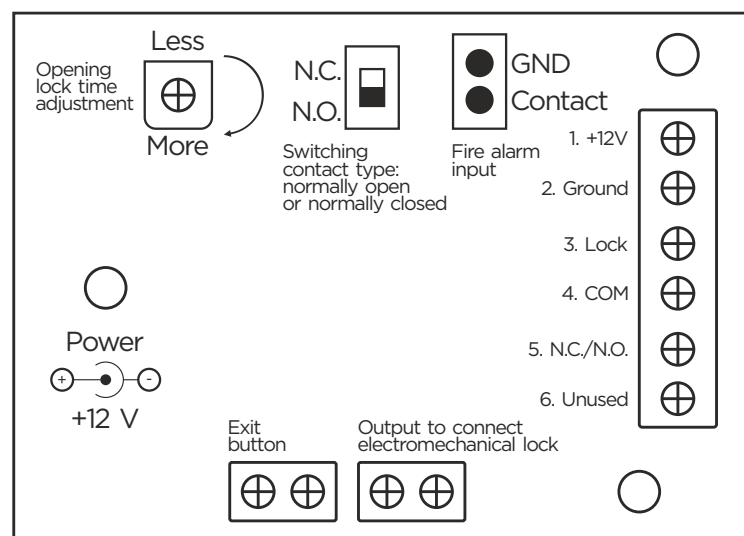


The connection scheme of all components

You can connect the exit button, electromechanical or electromagnetic lock to this device.

Also there is a Fire input to trigger relay in case of fire.

AA-07, AA-12, AA-14
BI-02, BI-04, BI-06, BI-08, BI-12
Outdoor panel

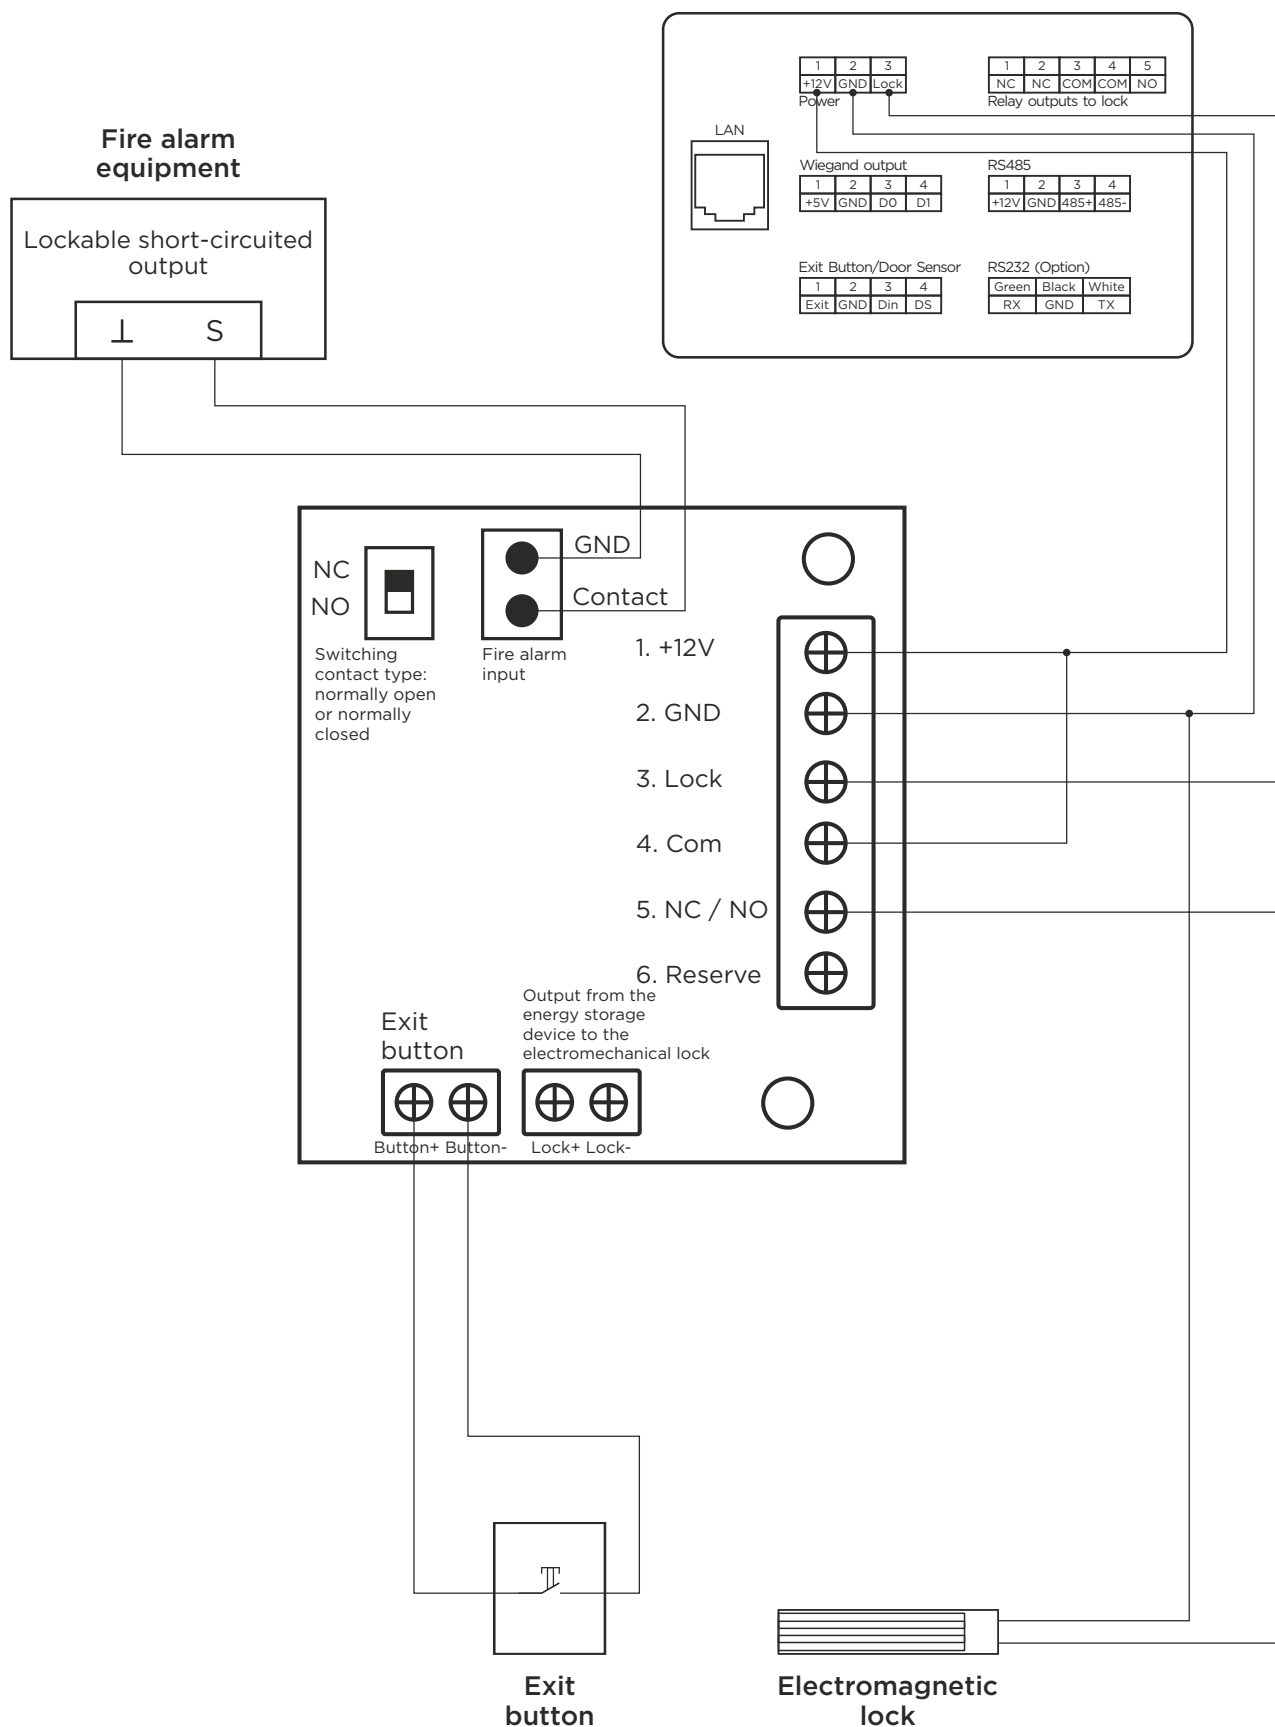

Connection diagram of outdoor panels using an electromagnetic lock connected from an uninterruptible power supply

AA-07, AA-12, AA-14
BI-02, BI-04, BI-06, BI-08, BI-12
Outdoor panel


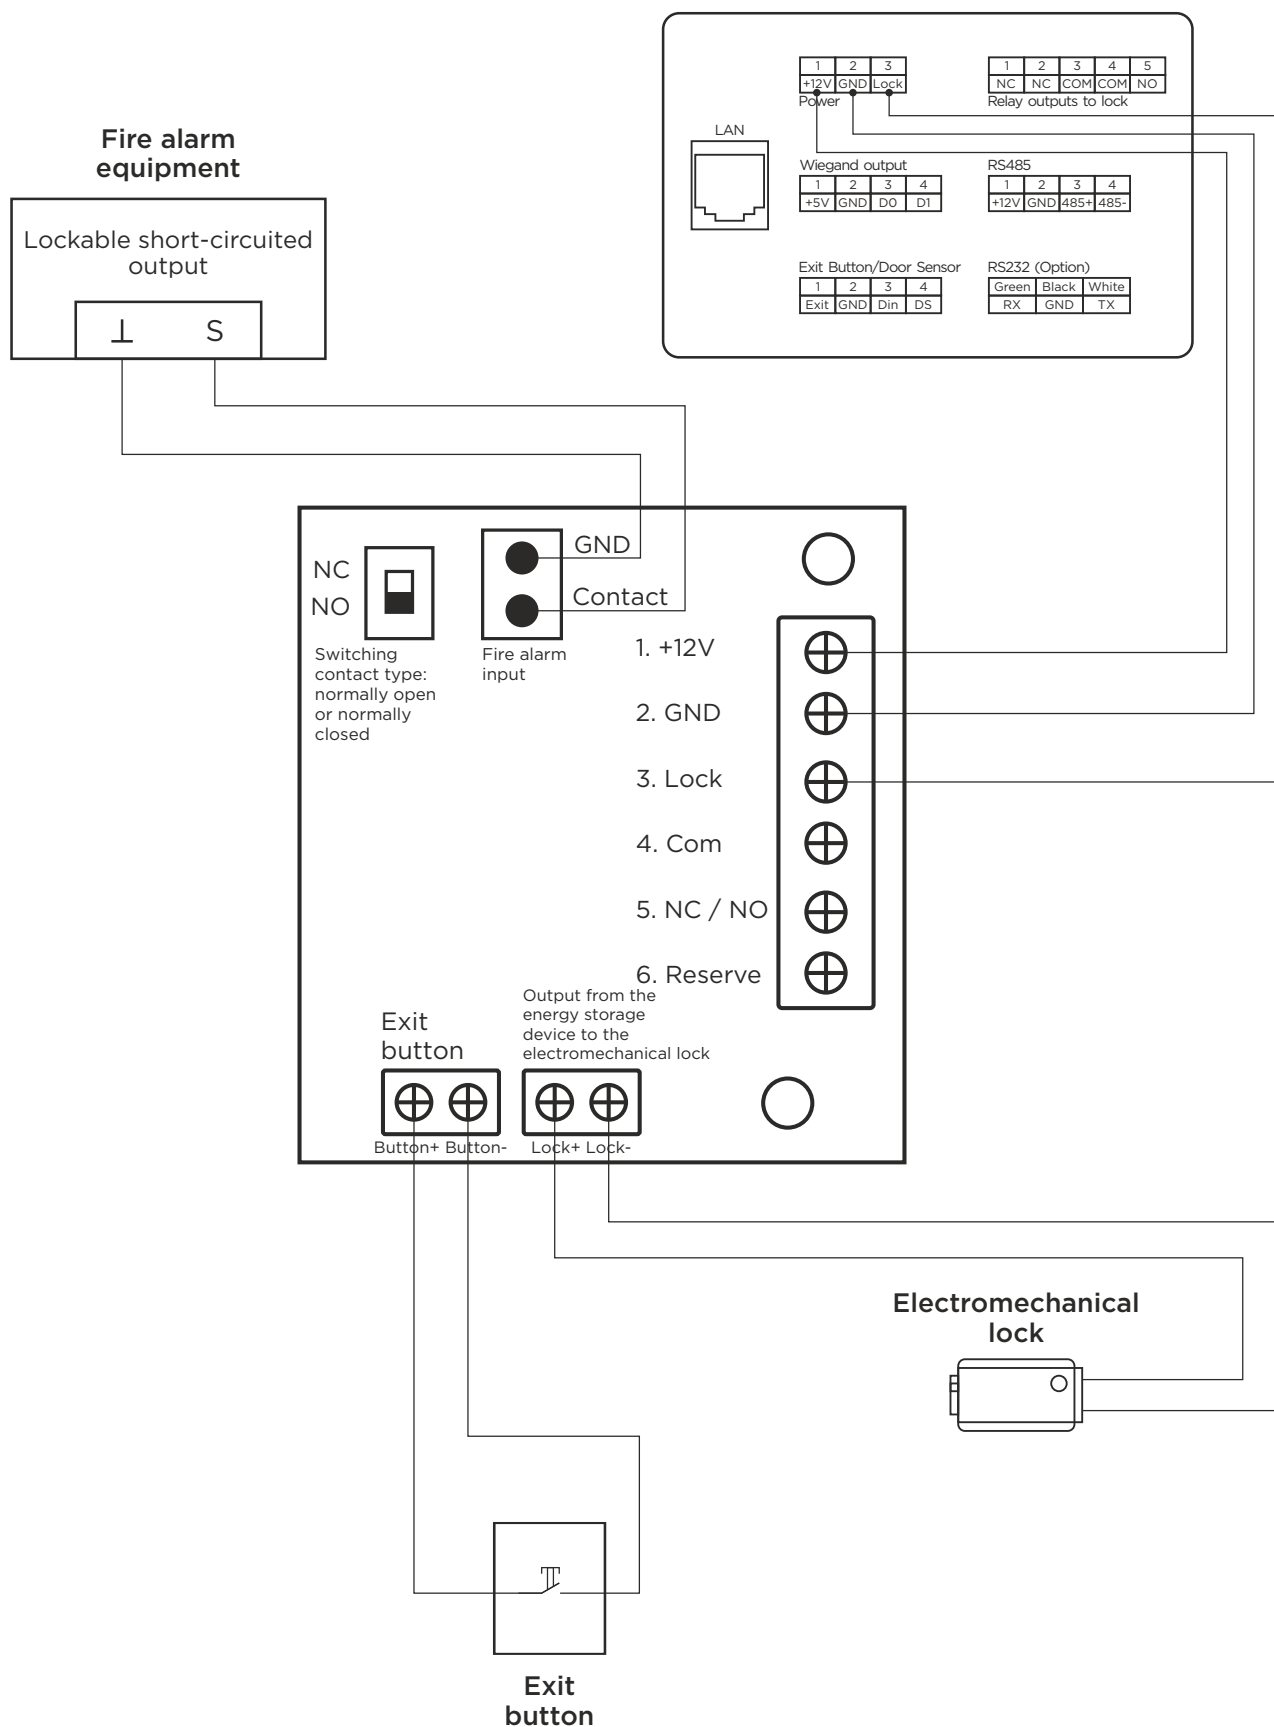


Diagram of connection of outdoor panels using an electromechanical lock connected from an uninterruptible power supply


Mechanical mounting

Before mounting the power unit, place on the wall with dimensions of $180 \times 190 \times 72$ mm must be provided.

It is also necessary to provide supply of a power cable, additional modules.

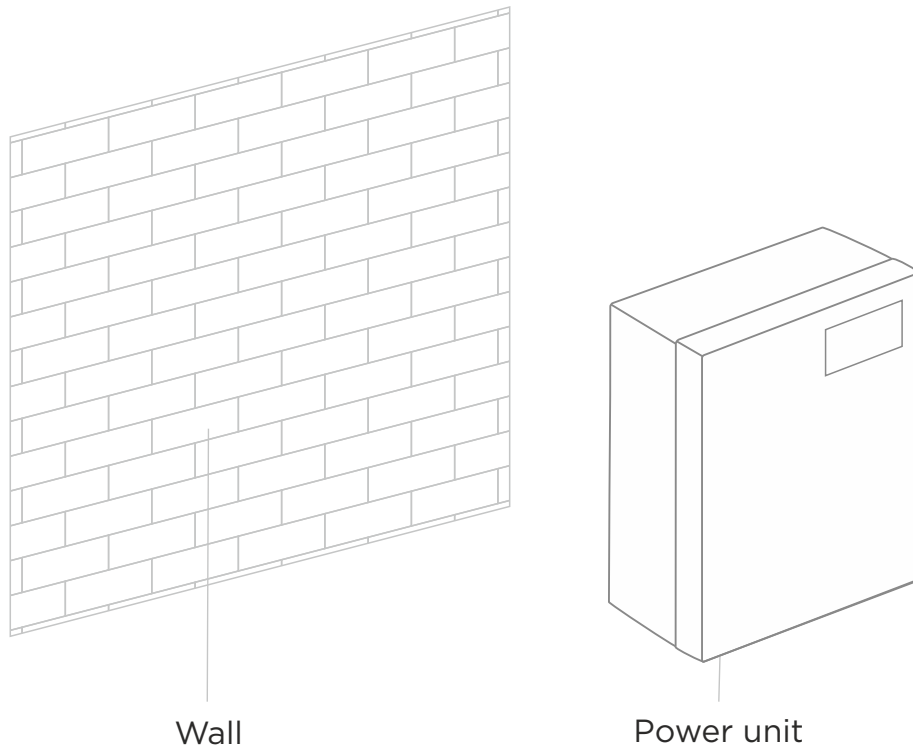

Power Unit

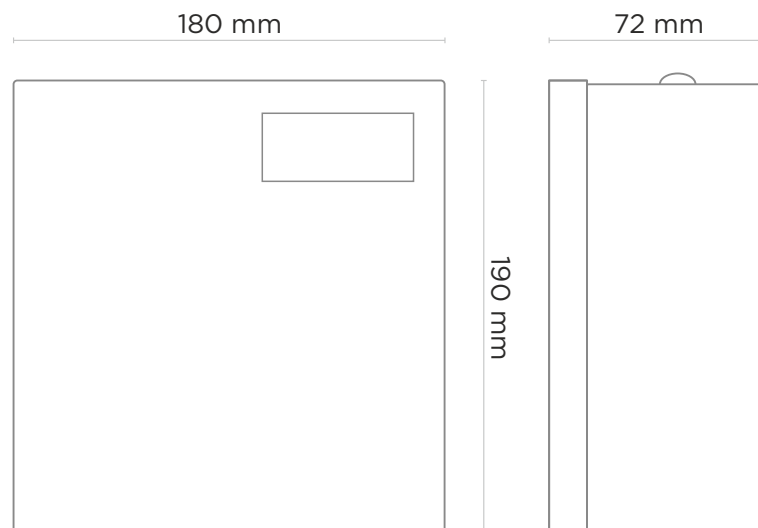

Warranty

The warranty card number

Model name

Serial number

Seller name

With following stated terms of warranty is familiar, functional test was performed in my presence:

Customer signature

Warranty conditions

The warranty period of the product — 36 (thirty-six) months from the date of sale.

- Transportation of product must be in its original packaging or supplied one by the seller.
- The product is accepted in warranty repair only with a properly filled warranty card and the presence of intact stickers or labels.
- The product is accepted for examination in accordance with the cases provided by law, only in the original packaging, in a full complete set, appearance corresponding to the new equipment and presence of all relevant properly filled documents.
- This warranty is in addition to the constitutional and other consumer rights and in no way restrict them.

Terms of warranty

- The warranty card must indicate the name of the model, serial number, purchase date, name of the seller, seller company stamp and the customer's signature.
- Delivery to the warranty repair is carried out by the buyer himself.
- Warranty repairs carried out only during the warranty period specified in the warranty card.
- The service center is committed to do everything possible to carry out the repair warranty products, up to 24 working days. The period spent on the restoration of product functionality is added to the warranty period.



www.bas-ip.com