

## DS-AT1000S/432 Series Storage System

### Introduction

DS-AT1000S/432 series storage system is a storage product with huge capacity and high-density design. A 4U chassis provides up to 432 TB capacity. Compared to general storage product, DS-AT1000S reduces the total cost at up to 50%. iRAID technology realizes an intensive management for storage space and data, and protects the data security from substructure. Support periodic HDD replacement, which guarantees the product availability.



### Key Feature

#### Huge Capacity and High Density

- A 4U chassis provides up to 432 TB capacity
- High-density design reduces the installation space requirement and transportation cost

#### Low consumption

For 18 TB enterprise HDD, lower consumption for each terabyte at 50%

#### Security and Reliability

- iRAID technology and N + M redundant mechanism allow up to 2 error HDDs in a single RAID
- HDD encryption technology protects data security by only allowing Hikvision device to read the data in HDD

#### Maintenance-Free

- Rebuild fault HDD on-demand
- HDD periodic automatic replacement

#### Stream Data Management Structure of High Performance

Based on the bottom layer management structure of the stream media, it solves the problem that the damaged file system will lead to file unreadability or loss and ensures no file fragments will be produced during overwriting

#### Direct Storage of Mixed Stream

- Supports mixed storage of video stream and SMART stream
- Supports camera access through protocols including RTSP, ONVIF, etc.

#### iRAID

Erasur encoding and iRAID technologies ensure data integrity even when 2 HDDs in a single RAID are failed. If the number of error HDD exceeds redundant limit, other HDDs can still be read and written

#### Abundant Application

- Continuous recording, manual recording, and alarm recording

#### User-Friendly Operation and Maintenance


- Supports one-key configuration to improve system configuration efficiency
- Raises device maintenance efficiency via abundant alarm management methods, like alarm via indicators, and emails.



## Specification

Model		DS-AT1000S/432
Performance	Video (2 Mbps stream + rebuilding)	400-ch
Controller	Processor	64-bit multi-core processor
	Cache	16 GB, extendable to 32 GB
Storage	HDD slot	24 (the device is packaged with 24 HDDs)
	Interface	SATA
	Capacity	Up to 18 TB per HDD
	RAID	iRAID, RAID5, RAID6
	Disk	Disk detection pre-alarm and repair
	Logical volume	Recording volume management
Recording	Recording type	Continuous recording, manual recording, and alarm recording
	Video protection	Video loss alarm
	Search and download	Log in storage system to search, play, and download videos. Support searching videos by time, and event type
Maintenance and Management	Management method	GUI based on web, serial port CLI, platform
	Alarm method	Audio, indicator, GUI
Network	Protocol	RTSP, ONVIF, HKSDK
External interface	Data network interface	4, 1000 Mbps Ethernet interface
	Management network interface	1, 1000 Mbps Ethernet interface
	SAS interface	1
	COM interface	1, RS-232
	USB interface	2 × USB 3.0, 2 × USB 2.0
	VGA interface	Supported (VGA and RS-232 interface cannot be used at the same time)
	IPMI interface	Supported
General	Power supply	100 to 240 VAC/47 to 63Hz, redundant power supply
	Power consumption (with HDDs)	≤ 369.8 W
	Environment temperature	<ul style="list-style-type: none"> <li>Working: 5 °C to 40 °C (41 °F to 104 °F)</li> <li>Storing: -20 °C to +70 °C (-4 °F to +158 °F)</li> </ul>
	Environment humidity	<ul style="list-style-type: none"> <li>Working: 20% to 80% RH (non-condensing/frozen)</li> <li>Storing: 5% to 90% RH (non-condensing/frozen)</li> </ul>
	Dimensions (W × D × H)	445 × 175 × 746 mm (17.5 × 6.9 × 29.4 inch)
	Weight (without HDDs)	≤ 40 kg (88.2 lb)

## Physical Interface

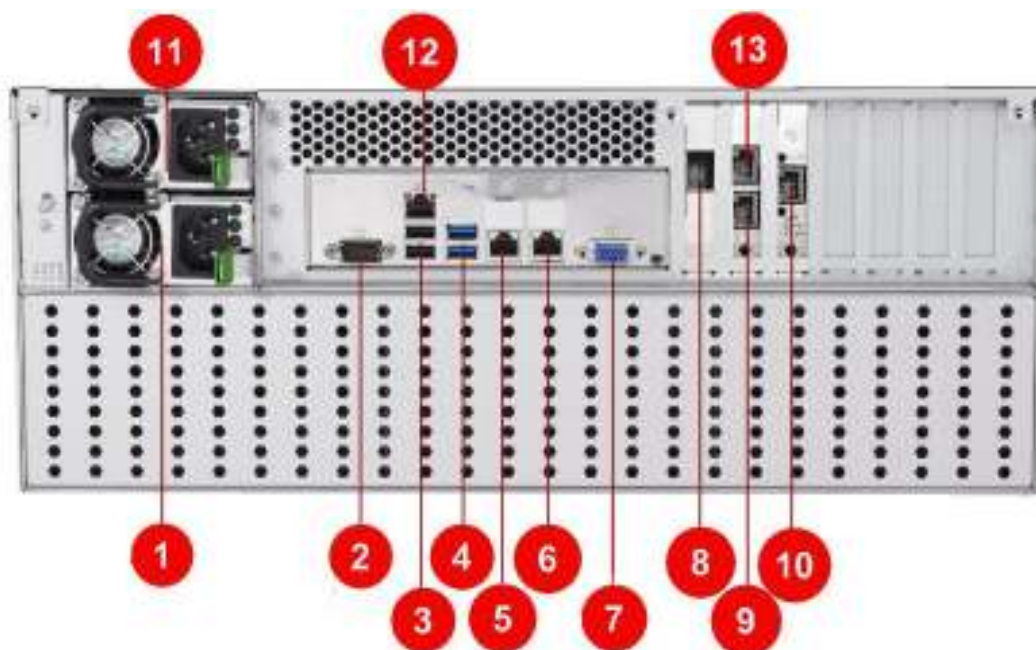

No.	Name	No.	Name
1	Power module 1	8	SAS interface
2	COM interface	9	Data network interface 3
3	Two USB interfaces	10	Management network interface
4	Two USB interfaces	11	Power module 2
5	Data network interface 1	12	IPMI
6	Data network interface 2	13	Data network interface 4
7	VGA interface		

## Available Model

DS-AT1000S/432

Distributed by


**HIKVISION**

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou, 310051, China  
T +86-571-8807-5368  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-000-855-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8595-4737  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-20469600  
sales@india.hikvision.com

**Hikvision Canada**  
T +1-866-200-6800  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +66-2-715-3046  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5540770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-5970  
info.it@hikvision.com

**Hikvision Brazil**  
T +55-11-5118-0050  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90-216671-7070-7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7552-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +41628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +271101035137  
sales.af@hikvision.com

**Hikvision France**  
T +3301-80-530-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-77-8770667  
russia.pacific@hikvision.ru

**Hikvision Vietnam**  
T +84-974270666  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4430000  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-9694-6718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-10-60  
info.es@hikvision.com

**Hikvision Tadzhik**  
T +99-07-1239-9438  
usb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2251-1781  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-609-07-88  
belarus@hikvision.com

**Hikvision Korea**  
T +82-1031-331-9817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-60-01-56  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com