

60 SERIES

HC60W45R2

HC60W45R4



5MP Network TDN WDR IR Outdoor Dome Camera



OPERATIONAL	HC60W45R2		HC60W45R4	
Video Standard	NTSC / PAL			
Scanning System	Progressive			
Image Sensor (Size : H × V)	1/2.8" CMOS (5.18 x 3.89 mm)			
Number Of Pixels (H × V)	5MP (2560 x 1920)			
Min. illumination (Color/B&W)	0.04 Lux / 0Lux (@F1.4 IR on)		0.04 Lux / 0Lux (@F1.6 IR on)	
S/N Ratio	60 dB			
Electronic Shutter Speed	1/32000 ~ 1/30			
IR Distance	Up to 50 m (165 ft)			
IR Light Control	Smart IR (Auto / Manual) / OFF, External IR trigger by output			
IR Light Number	4			
Removable IR-Cut Filter	Yes			
Day/Night	Auto / Day / Night / Synchronize with digital input / Schedule			
Backlight Compensation	WDR, HLC			
White Balance	Auto / Fixed Current / Manual			
Gain Control	0-100 %			
Wide Dynamic Range	120 dB			
Noise Reduction	3D DNR			
Lens (Remote focus)	2.7 ~ 13.5 mm, MFZ, P-IRIS, F 1.4 ~ F 2.8		7 ~ 22 mm, MFZ, P-IRIS, F 1.6 ~ F 2.9	
Angle Of View	H: 100° ~ 30°, V: 72° ~ 23		H: 39° ~ 16°, V: 29° ~ 12°	
G-Sensor	Support Camera Direction OSD Display (Default - Off)			
Privacy Masking	Off / On (5 Areas)			
Defog	Support			
Encryption Chipset	Built-in FIPS encryption Chipset			
Local Storage	Micro SD / SDHC / SDXC card slot (up to 256 GB), SD Card encryption			
Micro USB	Support Wifi Dongle for configuration			
Alarm Inputs / Outputs	2 In / 1 Relay Out			
VIDEO				
Video Compression	H.265 HEVC / H.264 / MJPEG, Smart Codec			
Resolution (16/9)	2560 x 1440 / 1920 x 1080 / 1600 x 904 / 1360 x 768 / 1280 x 720 / 640 x 360			
Resolution (4/3)	2560 x 1920 / 1600 x 1200 / 1280 x 960 / 640 x 480			
Number of Video Streams	3			
Frame Rate Main Stream & Frame Rate Second Stream	2560 x 1440 / 1920 x 1080 / 1600 x 904 / 1360 x 768 / 1280 x 720 / 640 x 360 (1-25/30 fps), 1920 x 1080 / 1600 x 904 / 1360 x 768 / 1280 x 720 / 640 x 360 (1-50/60 fps), 2560 x 1440 (1-50 fps)			
Frame Rate Third Stream	1280 x 960 / 640 x 480 (1-25/30 fps) 1280 x 720 / 640 x 360 (1-50/60 fps)			
Bit Rate (Control)	20 K ~ 80 Mbps			
AUDIO				
Audio Compression	G.711a / G.711 Mu / G.726			
Audio Stream	Full duplex, simplex			
Audio Interface	Line In / Out			

NETWORK	
Ethernet	10 Base-T / 100 Base-TX Ethernet (RJ-45)
Supported Web Browsers	Chrome 79.0 Internet Explorer 11
Supported OS	Microsoft Windows 10
Protocols*	IPv4, IPv6, TCP / IP, HTTP, HTTPS, UPnP, RTSP/RTP / RTCP, IGMP / Multicast, CIFS / SMB, SMTP, DHCP, NTP, DNS, DDNS, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS
Interoperability	ONVIF Profile G / S
Maximum Users Access	10 Users
Security	User account and password protection, HTTPS, IP Filter, Digest authentication, TLS1.2 only, Stream encryption, AES128 / 256, SSH / Telnet closed, PCIDSS compliance, FIPS Chipset Built-In
Languages Supported	English, French, German, Italian, Japanese, Portuguese, Russian, Spanish, Traditional Chinese
EVENTS / ANALYTICS	
Built-in Video Analytics	Intrusion, Loiter, Line crossing, Unattended object, Missing object, Face detection
Event type	Video motion detection, Periodically, Alarm input, System boot, Recording notification, Camera tampering detection
Event linkage	Event notification using digital output, HTTP, Email and MicroSD card
Region Of Interest	5
ELECTRICAL	
Power Supply	12 VDC / 24 VAC (50 / 60 Hz), Heat On: PoE (IEEE 802.3 at, Class 4), Heat Off: PoE (IEEE 802.3 at, Class 3), Auto Sensing
Power Consumption	MAX 25.5 W
MECHANICAL	
Dimensions (Ø x H)	Ø 159.0 mm x 118.3 mm (Ø 6.3" x 4.7")
Dome diameter	107.4 mm (4.2")
Product Weight	1.08 kg (2.38 lb)
Package Weight	2.14 kg (4.72 lb)
Body Material	Metal (die casting aluminum with powder coating)
Construction Color	RAL 120-1 (Lyric White)
ENVIRONMENTAL	
Operating Temperature	Starting & Working: -40°C ~ 60°C (802.3at PoE Class 4)
Relative Humidity	Less than 90 %, non-condensing
Ingress Protection	IP 66 / IP 67 / NEMA 4X
Impact Resistance	IK 10
Heater	Two (SOC/Lens)
Gore-Vent	Yes
Fan	Yes
REGULATORY	
Emissions	FCC PART 15, CE (EN 55032)
Immunity	CE (EN 50130-4)
Safety	UL LISTED TO UL / CSA 62368-1, CE (EN 62368-1), UL / CSA 60950-22, CE (EN 60950-22)
RoHS	CE (EN 50581), EAC (TR EAEU 037 / 2016), UAE (Cabinet Decree No.10 of 2017)
Country of Origin	Taiwan

Honeywell

60 SERIES 5MP NETWORK TDN WDR IR OUTDOOR DOME CAMERA

SYSTEM COMPATIBILITY

Pro-Watch NVR	Up to 256 IP channels RAID5 / 6 Enterprise NVR
MAXPRO NVR PE	Up to 128 IP channels RAID5 / 6 Enterprise NVR
MAXPRO NVR SE	Up to 64 IP channels System NVR
MAXPRO NVR XE	Up to 16 IP channels System NVR
MAXPRO NVR SOFTWARE	Up to 128 IP channels Recording Software
ADPRO NVR FastTrace 2E	Up to 32 IP channels with up to 32 VA channels NVRs
ADPRO NVR iFT-E	Up to 32 IP channels with up to 32 VA channels NVRs
ADPRO NVR iFT	Up to 32 IP channels or 16 IP channels with up to 16 VA channels NVRs
ADPRO NVR iFT Gateway	4 IP channels + 4 VA channels
HEN*4	8 / 16 / 32 / 64-channel Performance Series NVRs (H.264 and H.265)
Honeywell DVM	Supported with Honeywell DVM R700, DVM R620

OPTIONAL MOUNTS AND ACCESSORIES

HA60WLM4	Wall mount bracket for 4 inch dome, white
HA30PLM01	Pole Mount Adapter, white
HA30CNM01	Corner Mount Adapter, white
HA60PMC4	Pendant Mount Adapter, 1.5 NPT (outside), 3 / 4 NPT (inside), white
HA60CB4	4 inch Clear Bubble
HA60SB4	4 inch Smoked Bubble
HA60WIF	Wifi dongle and USB adapter for camera configuration




Learn more about 60 Series
accessories compatibility

ORDERING

HC60W45R2	5 MP Network Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 2.7-13.5 mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White
HC60W45R4	5 MP Network Outdoor Dome Camera, WDR 120 dB, 1/2.8" CMOS, 7-22 mm MFZ, 4 IR LEDs, PoE+, H.265 HEVC Smart Codec, IP66/67/IK10/NEMA4X, White

DIMENSIONS

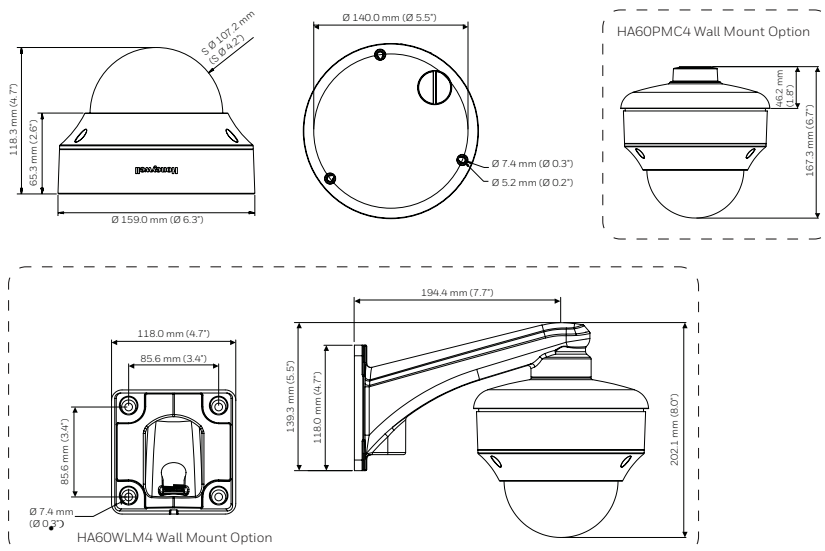

For more information

www.security.honeywell.com/uk
www.security.honeywell.com/me

Honeywell Commercial Security

Honeywell Security Office -
Emaar Business Park,
Sheikh Zayed Road
Building No. 2, 2nd floor, 201
Post Office Box 232362
Dubai, United Arab Emirates
Tel: +971 4 450 5800



ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
HEVC Advance logo is a trademark of HEVC Advance
Honeywell reserves the right, without notification, to
make changes in product design or specifications.

Aston Fields Road
Whitehouse Industrial Estate
Runcorn, Cheshire, WA7 3DL
United Kingdom
Tel: +44 (0)8448 000 235
www.honeywell.com

HSV-HC60W45Rx-02-UK(0720)DS-Z
© 2020 Honeywell International Inc.

Honeywell