


# CAV-706D/706M /706MTM/706IM

Suitable for interior as picture frame type

COMMAX Home Automation is compatible with a lobby phone, a kitchen TV, sub-unit, bathroom unit, designed to run a intelligent service, such as the alarming of burglar, fire, gas leakage with various sensors as well as access control with a single-card.

Event is notified to guard station or refined security company automatically so that it makes your home life safe.



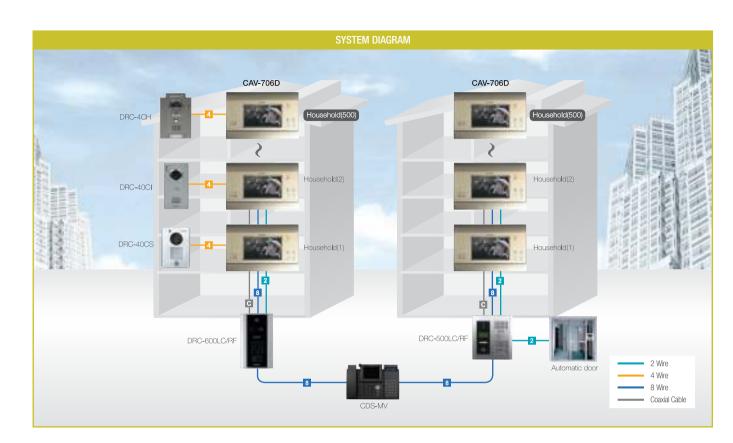

#### Specifications

• Power source : DC14V, 2.5A

• Mounting type : Flush mounted type

• Temperature : 0°C ~ +40°C (32°F ~ 104°F)

• Display : 7 inch wide color TFT LCD

• Wiring: Bus type with 12 wires(Lobby phone: 4 wires / Guard unit: 8 wires)
Individual camera: 4 wires

• Image Record : 128 cuts

• On-screen duration : 60 ± 30 sec

• Dimension: 308 x 200 x 20 [61](mm)


### Features

- ARS control(CAV-706IM)
- Record visitor's images(CAV-706M/MTM/IM)
- On screen display(OSD) interface(CAV-706IM)

#### Functions

- Monitoring & talk: Monitoring, Talk with a visitor, Monitoring a visitor in common entrance, Talk between households (Talk with video: optional), Compatible with 1.8GHz wireless telephone, Telephone function, Monitoring image of a visitor when being away, Door lock release
- Security: Intruder alarm, Fire alarm, Gas leakage alarm, Connection of security company
- Convenience function: All-put-out lights, Reviewing the alarm of a visitor when being away
- Remote control : ARS

#### CONNECTING DIAGRAM



## Recommended Products











DDC COOL C DDC FOOL C/DE DDC FOOL











