

DirectIP™ 16-channel Decoder

DD-1116 NEW

- Supports DirectIP™ NVR
- Supports HDMI, VGA, CVBS port
- Up to 4ch FHD display
- Up to 16ch real-time display




SPECIFICATIONS

DECODER	
Video Compression	H.264
Video Input	16ch IP
Supported Devices	DirectIP NVR
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI , VGA : 1920x1200, 1920x1080, 1680x1050, 1600x1200 CVBS : 640x480
Display Speed	Up to 480ips
Max. Network Throughput	48Mbps
Network Connection	Gigabit Ethernet x1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE(class)	Yes(IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	8W
Certifications	FCC ,CE

DIMENSIONS

(Unit - mm)

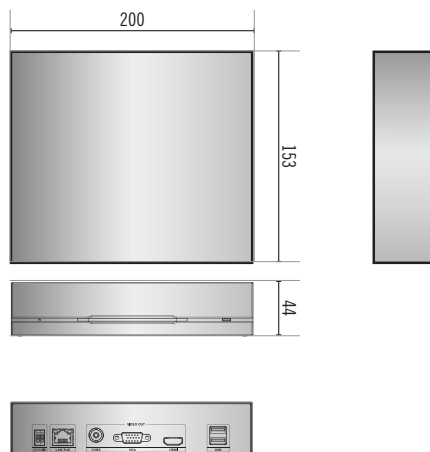

NVR

BOX

HOME

PTZ

BULLET

ZOOM

MONITOR

NETWORK ACCESSORIES

CAMERA ACCESSORIES

SOFTWARE

SOLUTION GUIDE

APPLICATIONS