



User Manual

Door Unit DR-2A3N



www.commax.com

COMMAX Co.,Ltd



- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.




① Microphone : Transmits visitor's voice.(Outdoor ⇒ Indoor)

2 Call Button: Call to household.


③ Speaker : Transmits householder's voice.(Indoor ⇒ Outdoor)

④ Name Tag : Name of each household.






- 1. Fix the hole of bracket with wall hole.
- 2. Connect Room station cables as appeared in the figure below.
- 3. Put the door unit inside of a back box as shown in the figure below.
- 4. Connect Door Release cable as appeared in the figure below.
- 5. Place the unit on the wall and mount with screws supplied.

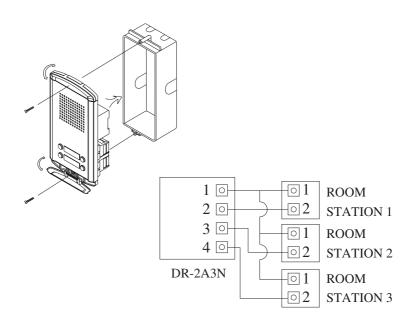







Specification

Model No.	DR-2A3N
Rated voltage/Power consumption	9V == (supplied from Room Unit)
Wiring	3 Wired
Installation	Flush mounted type
Dimension	123 X 210 X 16(59)mm
Operating Temp.	-10°C ~ +50°C



COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea Int'l Business Dept.: Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133 Web site: www.commax.com

PM132A3N0010 Printed In Korea / 2011.07.105