

DS-K1T672E
Face Recognition Terminal

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- 7-inch touch screen with bezel-less design
- Presents card on the screen to authenticate card permission
- Face recognition. Distance: 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- 50,000 face capacity, 50,000 card capacity (EM card), and 50,000 event capacity
- Supports Wiegand protocol and RS-485 protocol
- Two-way audio with indoor station and main station
- Supports ISAPI and ISUP5.0 protocol
- Configuration via the web client



▪ Specification


Display	
Dimensions	7-inch
Type	LCD
Operation method	Capacitive touch screen
Video	
Pixel	2 MP
Lens	× 2 Visible light lens × 1 , 850nm Infrared lens × 1
Audio	
Tone quality	Noise Suppression and Echo Cancellation
Network	
Communication protocol	ISUP5.0; SDK; RTSP; ISAPI; Hik-Connect; HikCentral Pro OpenAPI; Hik-ProConnect OpenAPI
Wired network	10 M/100 M/1000 M self-adaptive
Interface	
Network interface	1
Lock output	1
Exit button	1
Door contact input	1
Power interface	2-pin
Capacity	
Face capacity	50,000
Card capacity	50,000
Event capacity	50,000
Authentication	
Face recognition distance	0.3 to 3 m
Card reading frequency	125KHz
Face recognition accuracy rate	≥99%
Face recognition duration	< 0.2 s
Function	
QR code recognition	Support
Face anti-spoofing	Support
Audio prompt	Support
Time synchronization	Support
General	
Button	Touch screen
Power supply method	12 VDC Power Adapter
Working temperature	-10 °C to 50 °C (-58 °F to 122 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	185.8 × 103.36 × 20.7mm (7.31" × 4.07" × 0.81")
Application environment	Indoor
Installation	Surface mounting

Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional

▪ Available Model

DS-K1T672E

▪ Dimension

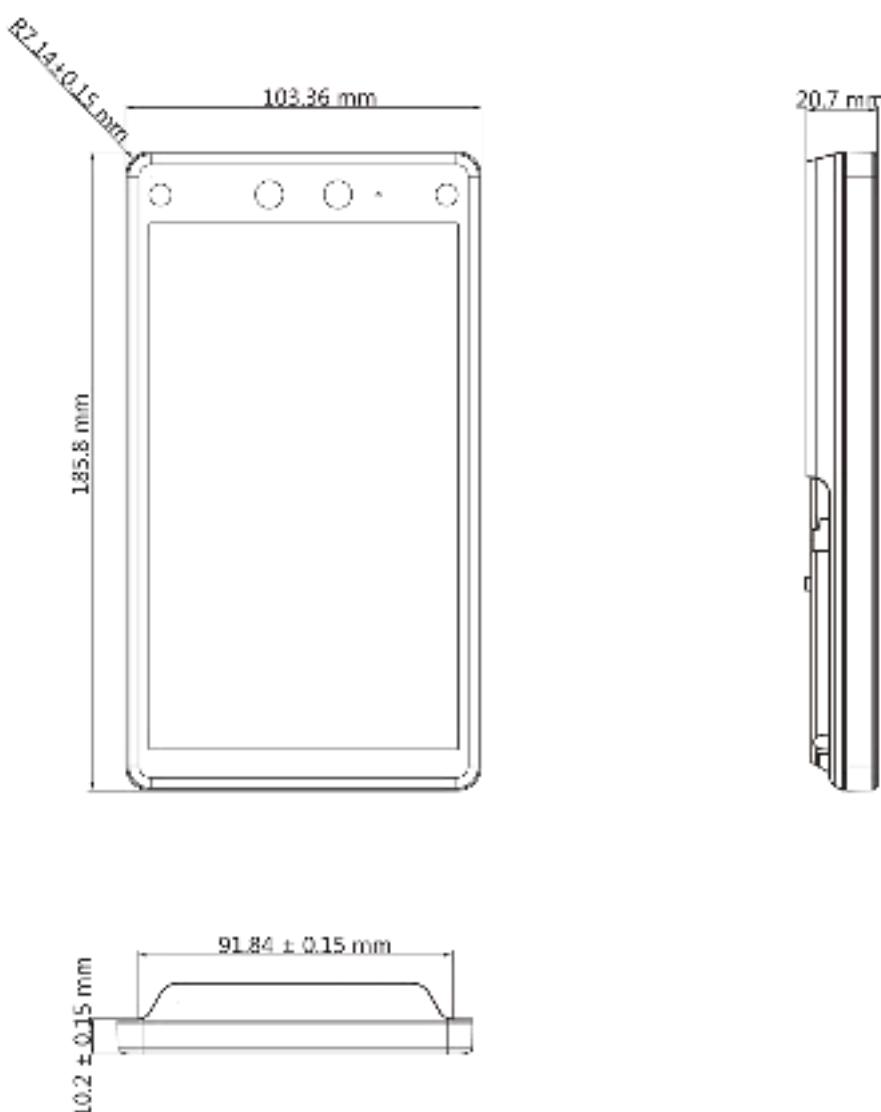

Distributed by



HIKVISION®

Headquarters

No. 555 Qianmei Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5398
overseasbusiness@hikvision.com

HIKVISION USA
T +1-909-985-0400
salesusa@hikvision.com

HIKVISION Australia
T +61-2-8593-4233
salesau@hikvision.com

HIKVISION India
T +91-22-29466600
sales@praman-hikvision.com

HIKVISION Canada
T +1-888-383-0888
salescanada@hikvision.com

HIKVISION Thailand
T +662-275-3946
sales.thailand@hikvision.com

HIKVISION Europa
T +31-23-5512770
sales.eu@hikvision.com

HIKVISION Italy
T +39-0659-0802
info.it@hikvision.com

HIKVISION Brazil
T +55-11-3316-0050
Latam.us.support@hikvision.com

HIKVISION Turkey
T +90 121 6521 7070-7074
sales.tr@hikvision.com

HIKVISION Malaysia
T +601-7652-6713
sales.my@hikvision.com

HIKVISION UK & Ireland
T +01520-902193
sales.uk@hikvision.com

HIKVISION South Africa
T +27 11 010361172
sales.za@hikvision.com

HIKVISION France
T +33(0)1-85-330-450
Info.fr@hikvision.com

HIKVISION Kazakhstan
T +7-727-6720667
khazakstan@hikvision.com

HIKVISION Vietnam
T +84-974278888
vietnam@hikvision.com

HIKVISION UAE
T +971-4-4422090
sales.ae@hikvision.com

HIKVISION Singapore
T +65-8884-4718
sg@hikvision.com

HIKVISION Spain
T +34-91-737-16-55
spain@hikvision.com

HIKVISION Tashkent
T +99-71-1233-98-98
uzbekistan@hikvision.com

HIKVISION Hong Kong
T +852-2151-1781
hk@hikvision.com

HIKVISION Russia
T +7-495-683-67-90
sales.ru@hikvision.com

HIKVISION Korea
T +82-10151-731-8817
sales.korea@hikvision.com

HIKVISION Poland
T +48-22-463-01-50
info.pl@hikvision.com

HIKVISION Indonesia
T +62-21-2932-7201
sales.indonesia@hikvision.com

HIKVISION Colombia
sales.colombia@hikvision.com