

HS-217SHB-BL Outdoor- housing




Key Features

- Anti-corrosive and ultraviolet-proof material to enhance outdoor durability
- Combined with adjustable sun shade from direct solar radiation
- Build-in temperature controlling
- Built-in temperature control module, it can automatically control heater and fan's working condition according to ambient temperature
- Heater on with simultaneous fan against foggy glass cover
- Easy and flexible installation with side open structure
- IP65-rated

Specifications

Housing	HS-217SHB-BL
Application	Outdoor (including sun shade, Heater,Fan)
Ingress Protection	IP65
Power supply	AC24V
Power	Heater: 40W, Fan: 4.3W
Operating Condition	-35°C~+50°C(-31°F ~ 122°F) Humidity ≤ 100% RH(non-condensing)
Working conditions of temperature control module	The heating on: ≥5° ±5°C, The heating off: ≥12° ±5°CThe fan opens when the heat is turned on Open the fan: ≤40° ±5°C, Close the fan: ≤30° ±5°C
Dimensions (L × W × H)	Outside: 433mm×161mm×112mm(17.04" x 6.3"x 4.4") Inside: 309.4mm×106.4mm×78.5mm(12.2" x 4.2"x 3.1")
Weight	1.6KG(3.53lb)
Material	Shell: aluminum alloy Sun shade:plastic Front and rear lids: plastic

Dimensions

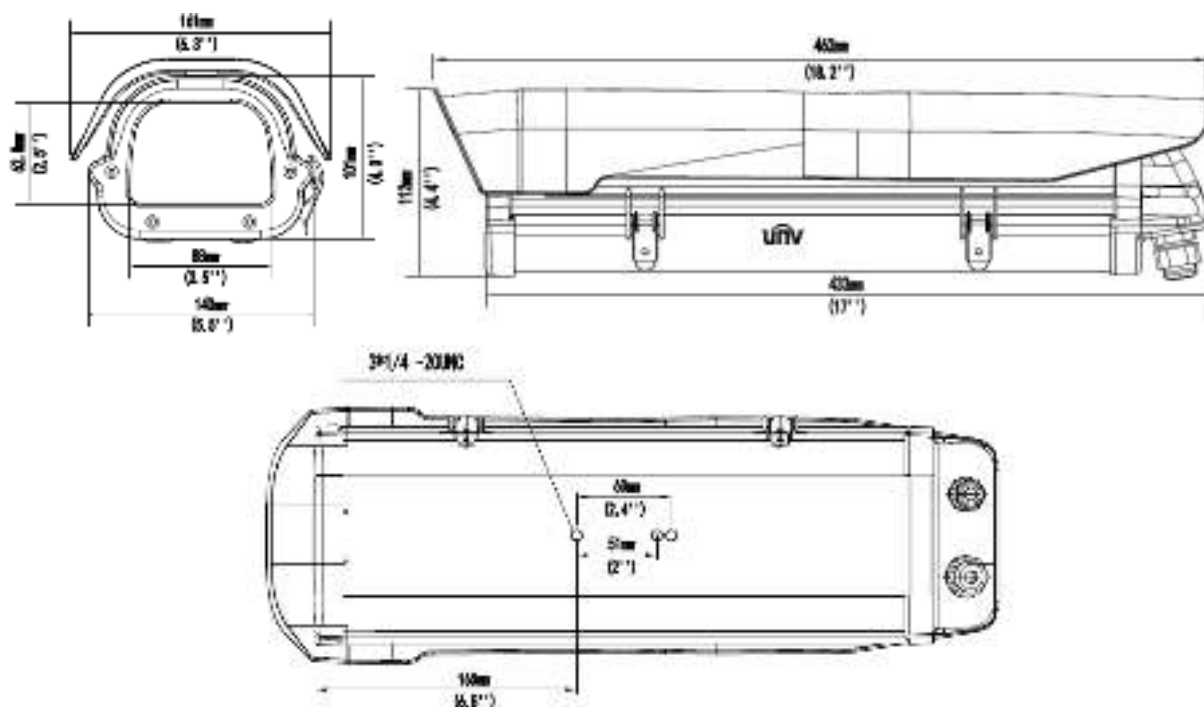

Accessories

Housing	Amount	Remarks
Pendant mount	1	17 "outdoor basic protection shield ,Sun shade, Heating,fan

Installation mode	Accessories	Description
Pendant mount	AE-TR-CM06	/
Wall mount	Indoor: AE-TR-WM06-A Outdoor: AE-TR-WM06-B	/
Rail mount	AE-TR-UV06-A + AE-TR-UP06	/
Standing pole mount	AE-TR-WM06-B + AE-TR-UP06	/
Pole mount	AE-TR-UV06-A	/



Zhejiang Uniview Technologies Co.,Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.