



JC-VD720V-212IR


УЛИЧНАЯ ВИДЕОКАМЕРА 720P С ИК-ПОДСВЕТКОЙ
СТАНДАРТА AHD



ОСОБЕННОСТИ

- Матрица 1/3" CMOS SONY IMX225 1.3 Мп
- Процессор NVP2431H
- Разрешение HD 720P (1280x720)
- Объектив вариофокальный 2,8~12 мм
- Угол обзора: горизонтальный — 71°, вертикальный — 54°
- ИК-подсветка до 30 метров
- Функции Smart IR, DSS, BLC, AGC, 3DNR, D-WDR, De-Fog
- Температурный режим от -30°C до +50°C
- Питание DC12V±10%
- Защита от неправильной полярности (переплюсовки)
- Низкое энергопотребление

РАЗМЕРЫ

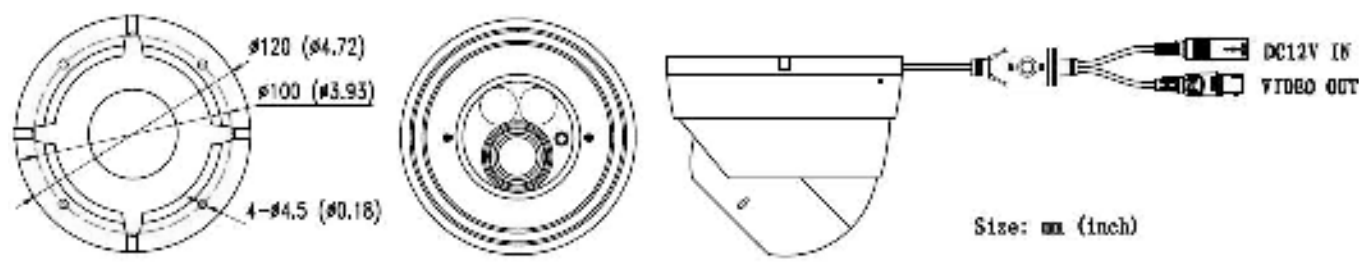

ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/3" Sony 1.3Mega-pixel CMOS
Pixels	1305(H)*977(V)
Horizontal Resolution	720P
Viewing Angle	Diagonal:91°/Horizontal:71°/Vertical:54°
Minimum Lux	0 Lux (2 Pieces IR LED ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Horizontal Frequency	NTSC:15.734KHz PAL:15.625KHz
Scanning System	Progressive
S/N Ratio	≥ 72 dB
Electronic Shutter	NTSC:1/60-1/100,000S PAL:1/50-1/100,000S
Lens	2.8-12 mm Varifocal IR Lens
White Balance	ATW
OSD	YES
BackLight Compensation	AUTO
AUTO Gain Control	ON
Defog	OFF/ON
DNR	OFF/ON
WDR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	30m
Gamma	0.45
Video Output	HD-AHD(720P)/ CVBS
Power Supply	DC12V/55mA±6mA (wide voltage:9V-18V)
Current consumption	300mA (MAX)
Dimension	ø 93x75mm (3.66"x2.95")
Weight	330g (11.64oz)
Storage Temperature	-30°C — +60°C
Operating Temperature	-30°C — +50°C